


中国第一重型机械集团公司标准

半圆头铆钉

GB 867-86
代替 GB 867-76

材料：ML2 或 T3

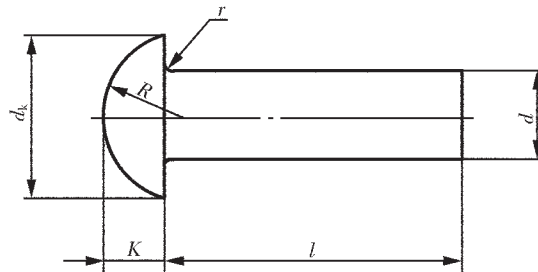

标记示例：

公称直径 $d=8$ mm，公称长度 $l=50$ mm 的半圆头铆钉的标记为：

铆钉 8×50；备注栏注：GB 867-86

表 1

mm

d	公称	4	6	8	10
	max	4.08	6.08	8.1	10.1
min	3.92	5.92	7.9	9.9	
d_k	max	7.39	11.35	14.35	17.35
	min	6.81	10.65	13.65	16.65
K	max	2.6	3.84	5.04	6.24
	min	2.2	3.36	4.56	5.76
$R \approx$		3.8	6	8	9
r	max	0.3	0.3	0.3	0.3

注：① 全部▲。

② 技术条件按 GB 116-86 规定。

表 2

公 称	l (mm)		d (mm)			
	min	max	4	6	8	10
	每 1000 个钢铆钉的重量 $kg \approx$					
8	7.71	8.29	1.205			
9	8.71	9.29	1.298			
10	9.71	10.29	1.391	3.710		
11	10.65	11.35	1.484	3.920		
12	11.65	12.35	1.577	4.129		
13	12.65	13.35	1.670	4.338		
14	13.65	14.35	1.763	4.547		
15	14.65	15.35	1.856	4.756		
16	15.65	16.35	1.949	4.966	9.683	15.56
17	16.65	17.35	2.042	5.175	10.06	16.14
18	17.65	18.35	2.135	5.384	10.43	16.73
19	18.58	19.42	2.228	5.593	10.80	17.31
20	19.58	20.42	2.321	5.803	11.17	17.89
22	21.58	22.42	2.507	6.221	11.92	19.05
24	23.58	24.42	2.693	6.640	12.66	20.21
26	25.58	26.42	2.879	7.058	13.40	21.38
28	27.58	28.42	3.065	7.476	14.15	22.54
30	29.58	30.42	3.251	7.895	14.89	23.70
32	31.5	32.5		8.313	15.63	24.86
34	33.5	34.5		8.732	16.38	26.02
36	35.5	36.5		9.150	17.12	27.19
38	37.5	38.5		9.569	17.87	28.35
40	39.5	40.5		9.987	18.61	29.51
42	41.5	42.5			19.35	30.67
44	43.5	44.5			20.10	31.84
46	45.5	46.5			20.84	33.00
48	47.5	48.5			21.59	34.16
50	49.5	50.5			22.33	35.32
52	51.4	52.6				36.49
55	54.4	55.6				38.23
58	57.4	58.6				39.97
60	59.4	60.6				41.14