


中国第一重型机械集团公司标准

沉头铆钉 (粗制)

GB 865-86
代替 GB 865-76

材料: ML2 或 T3

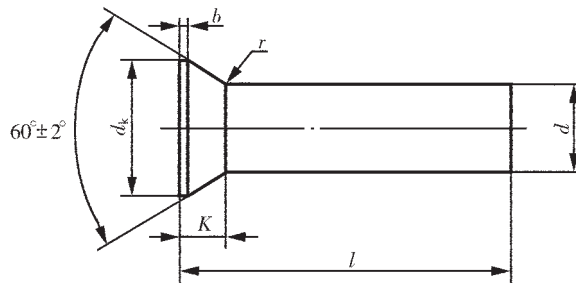

标记示例:

公称直径 $d=12$ mm, 公称长度 $l=50$ mm 的沉头铆钉的标记为:

铆钉 12×50; 备注栏注: GB 865-86

表 1

mm

d	公称	12	16	20	24	30	36
	max		12.3	16.3	20.35	24.35	30.35
min		11.7	15.7	19.65	23.65	29.65	35.6
d_k	max	19.6	25.7	33.4	40.4	51.4	59.8
	min	17.6	23.7	30.6	37.6	48.6	56.2
r	max	0.5	0.5	0.8	0.8	0.8	0.8
b	max	0.6	0.6	0.8	0.8	0.8	0.8
K	≈	6	8	11	13	17	19

注: 技术条件按 GB 116-86 规定。

表 2

公 称	l (mm)		d (mm)					
	min	max	12	16	20	24	30	36
			每 1000 个钢铆钉的重量 kg \approx					
20	19.35	20.65	25.61					
22	21.35	22.65	27.29					
24	23.35	24.65	28.96	56.29				
26	25.35	26.65	30.63	59.26				
28	27.35	28.65	32.31	62.24				
30	29.35	30.65	33.98	65.22	116.3			
32	31.2	32.8	35.65	68.19	120.9			
35	34.2	35.8	38.17	72.66	127.9			
38	37.2	38.8	40.68	77.12	134.9			
40	39.2	40.8	42.35	80.09	139.5			
42	41.2	42.8	44.02	83.07	144.2			
45	44.2	45.8	46.53	87.53	151.1			
48	47.2	48.8	49.05	92.00	158.1			
50	49.2	50.8	50.72	94.97	162.8	247.0		
52	51.05	52.95	52.39	97.95	167.4	254.1		
55	54.05	55.95	54.90	102.4	174.4	264.2		
58	57.05	58.95	57.41	106.9	181.4	274.2		
60	59.05	60.95	59.09	109.9	186.0	280.9	481.2	
65	64.05	65.95	63.27	117.3	197.6	297.6	507.4	748.2
70	69.05	70.95	67.46	124.7	209.3	314.4	533.6	785.9
75	74.05	75.95	71.64	132.2	220.9	331.1	559.7	823.5
80	79.05	80.95		139.6	232.5	347.8	585.9	861.2
85	83.9	86.1		147.0	244.1	364.6	612.0	898.8
90	88.9	91.1		154.5	255.8	381.3	638.2	936.5
95	93.9	96.1		161.9	267.4	398.1	664.3	974.2
100	98.9	101.1		169.4	279.0	414.8	690.5	1012
110	108.9	111.1			302.3	448.3	742.8	1087
120	118.9	121.1			325.5	481.8	795.1	1162
130	128.7	131.3			348.8	515.2	847.4	1238
140	138.7	141.3			372.0	548.7	899.7	1313
150	148.7	151.3			395.2	582.2	952.0	1388
160	158.7	161.3				615.7	1004	1464
170	168.7	171.3				649.1	1057	1539
180	178.7	181.3				682.6	1109	1614
190	188.55	191.45					1161	1690
200	198.55	201.45					1214	1765