




## 2-6. 能力修正系数


### ■ 管长修正系数

下图根据管道长度和高度差给出了管长修正系数。管长和高度差是指主室外机与室内机间的长度和高度差。

#### ● 制冷

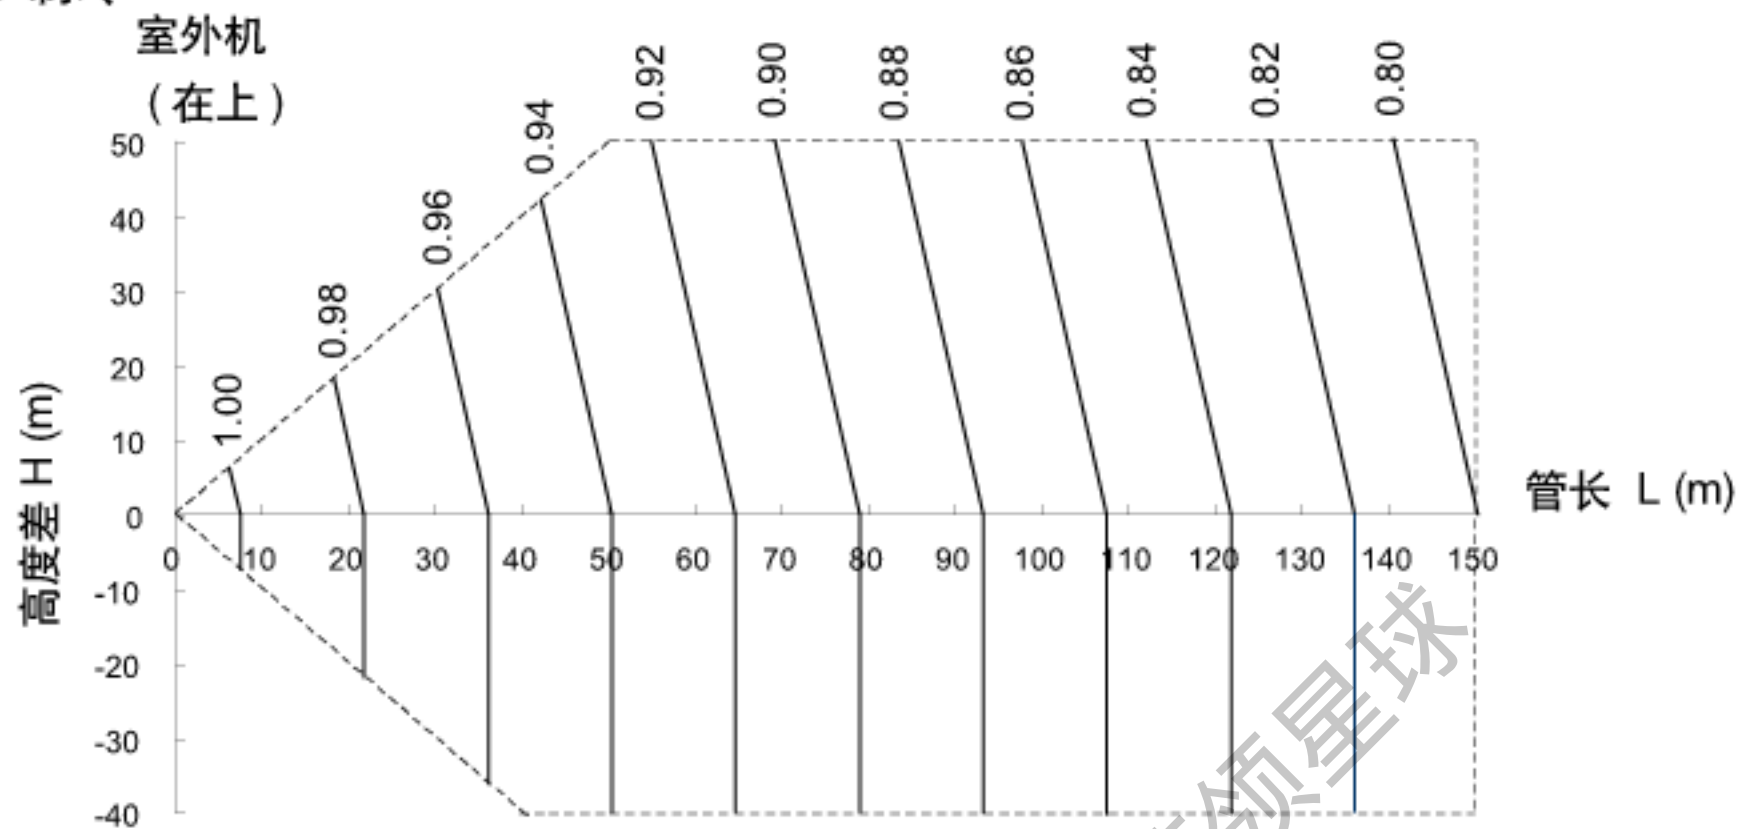

#### ● 制热

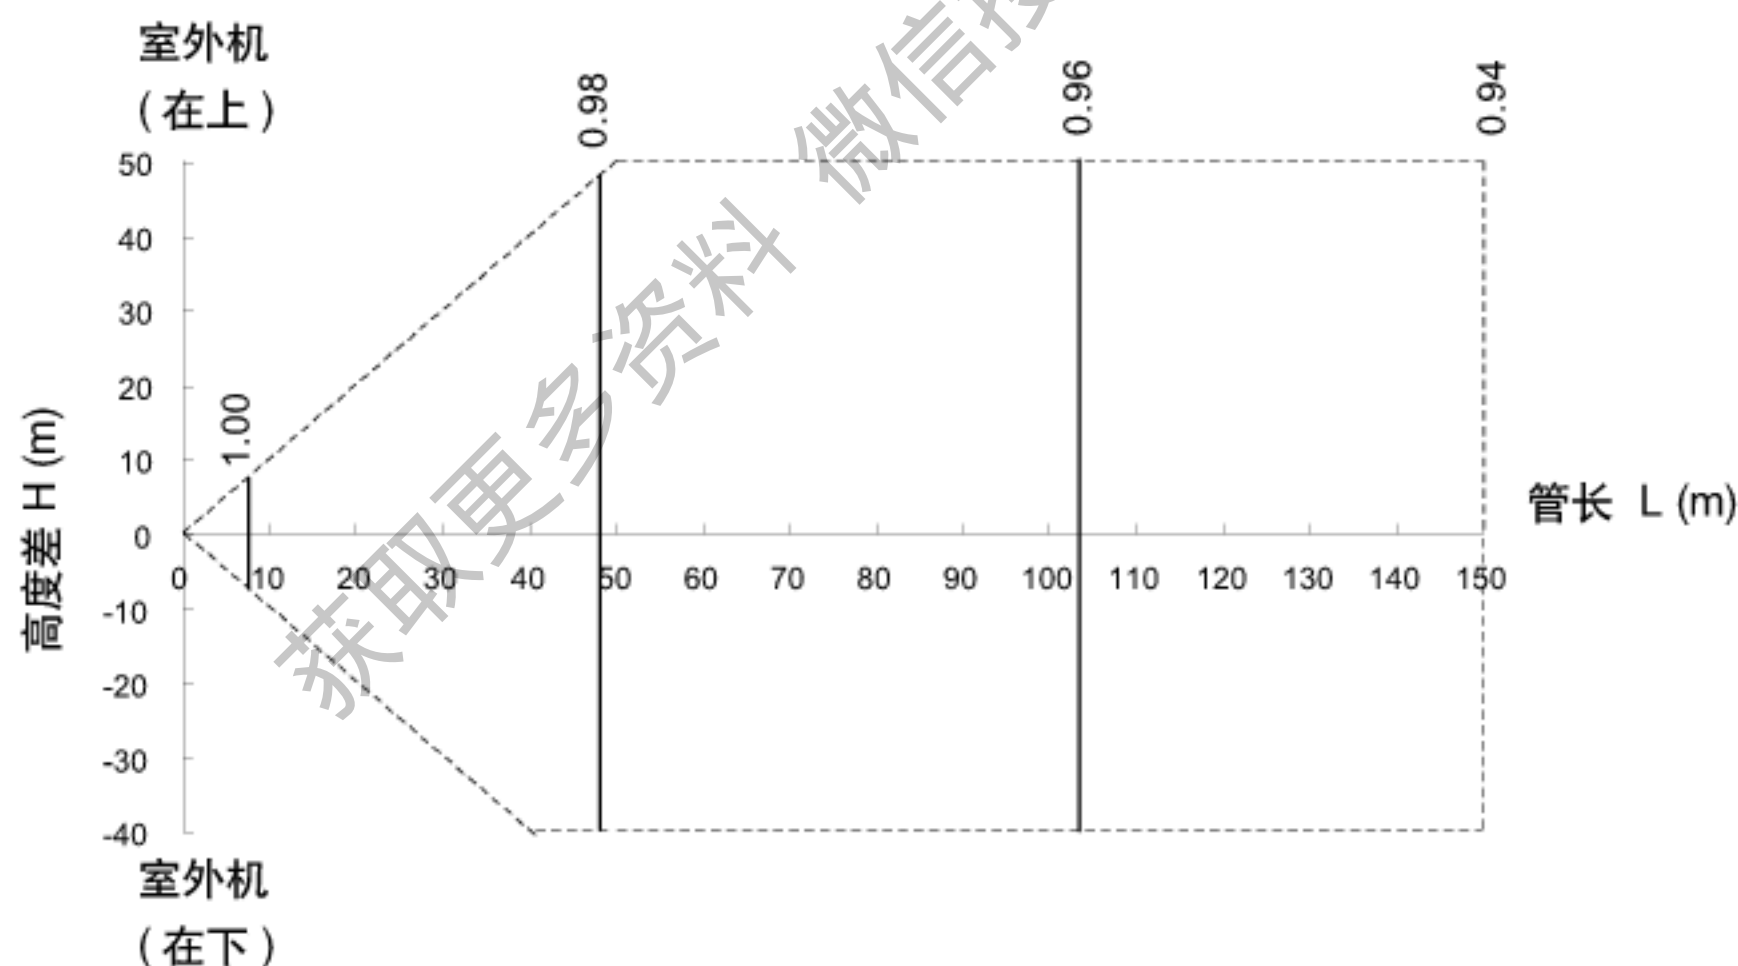

### ■ 结霜 / 除霜修正系数 (制热运行)

考虑累积的除霜运行对制热能力的影响应当根据下表所示的能力修正系数对室外机容量进行修正。

室外温度 (° CDB / ° CWB)	-15 / -16	-9 / -10	-7 / -8	-3 / -4	0 / -1	2 / 1	5 / 4	7 / 6
修正系数	0.96	0.94	0.92	0.89	0.83	0.84	0.90	1.00

## 2-7. 制冷能力一览表 (室内机)

### 2-7-1. 小型四出风嵌入式

#### 制冷能力

#### ■ 型号 : AUQB022

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	1.5	1.2	1.6	1.5	1.8	1.6	2.0	1.8	2.2	1.8	2.4	1.8	2.8	1.9	3.0	2.0
15	1.5	1.2	1.6	1.5	1.8	1.6	2.0	1.8	2.2	1.8	2.4	1.8	2.8	1.9	3.0	2.0
21	1.5	1.2	1.6	1.5	1.8	1.6	2.0	1.8	2.2	1.8	2.4	1.8	2.8	1.9	2.9	2.0
23	1.5	1.2	1.6	1.5	1.8	1.6	2.0	1.8	2.2	1.8	2.4	1.8	2.8	1.9	2.8	2.0
25	1.5	1.2	1.6	1.5	1.8	1.6	2.0	1.8	2.2	1.8	2.4	1.8	2.7	1.9	2.8	2.0
27	1.5	1.2	1.6	1.5	1.8	1.6	2.0	1.8	2.2	1.8	2.4	1.8	2.7	1.9	2.7	2.0
30	1.5	1.2	1.6	1.5	1.8	1.6	2.0	1.8	2.2	1.8	2.4	1.8	2.6	1.8	2.7	1.9
33	1.5	1.2	1.6	1.5	1.8	1.6	2.0	1.8	2.2	1.8	2.4	1.8	2.6	1.8	2.6	1.9
35	1.5	1.2	1.6	1.5	1.8	1.6	2.0	1.8	2.2	1.8	2.4	1.8	2.5	1.8	2.6	1.9
37	1.5	1.2	1.6	1.5	1.8	1.6	2.0	1.8	2.2	1.8	2.4	1.8	2.5	1.8	2.5	1.9
40	1.5	1.2	1.6	1.5	1.8	1.6	2.0	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.9
43	1.5	1.2	1.6	1.5	1.8	1.6	2.0	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.4	1.9
46	1.5	1.2	1.6	1.5	1.8	1.6	2.0	1.8	2.2	1.8	2.2	1.8	2.3	1.7	2.3	1.8

#### ■ 型号 : AUQB028

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	1.8	1.4	2.1	1.7	2.3	1.8	2.6	2.0	2.8	2.1	3.0	2.1	3.5	2.2	3.8	2.4
15	1.8	1.4	2.1	1.7	2.3	1.8	2.6	2.0	2.8	2.1	3.0	2.1	3.5	2.2	3.8	2.4
21	1.8	1.4	2.1	1.7	2.3	1.8	2.6	2.0	2.8	2.1	3.0	2.1	3.5	2.2	3.7	2.3
23	1.8	1.4	2.1	1.7	2.3	1.8	2.6	2.0	2.8	2.1	3.0	2.1	3.5	2.2	3.6	2.3
25	1.8	1.4	2.1	1.7	2.3	1.8	2.6	2.0	2.8	2.1	3.0	2.1	3.5	2.2	3.5	2.3
27	1.8	1.4	2.1	1.7	2.3	1.8	2.6	2.0	2.8	2.1	3.0	2.1	3.4	2.2	3.5	2.3
30	1.8	1.4	2.1	1.7	2.3	1.8	2.6	2.0	2.8	2.1	3.0	2.1	3.4	2.1	3.4	2.2
33	1.8	1.4	2.1	1.7	2.3	1.8	2.6	2.0	2.8	2.1	3.0	2.1	3.3	2.1	3.3	2.2
35	1.8	1.4	2.1	1.7	2.3	1.8	2.6	2.0	2.8	2.1	3.0	2.1	3.2	2.1	3.3	2.2
37	1.8	1.4	2.1	1.7	2.3	1.8	2.6	2.0	2.8	2.1	3.0	2.1	3.2	2.1	3.2	2.2
40	1.8	1.4	2.1	1.7	2.3	1.8	2.6	2.0	2.8	2.1	3.0	2.1	3.1	2.0	3.1	2.1
43	1.8	1.4	2.1	1.7	2.3	1.8	2.6	2.0	2.8	2.1	2.9	2.1	3.0	2.0	3.1	2.1
46	1.8	1.4	2.1	1.7	2.3	1.8	2.6	2.0	2.8	2.0	2.8	2.0	2.9	2.0	3.0	2.1

#### ■ 型号 : AUQB036

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	2.4	1.8	2.7	2.3	3.0	2.4	3.3	2.6	3.6	2.7	3.9	2.7	4.5	2.9	4.8	3.1
15	2.4	1.8	2.7	2.3	3.0	2.4	3.3	2.6	3.6	2.7	3.9	2.7	4.5	2.9	4.8	3.1
21	2.4	1.8	2.7	2.3	3.0	2.4	3.3	2.6	3.6	2.7	3.9	2.7	4.5	2.9	4.7	3.0
23	2.4	1.8	2.7	2.3	3.0	2.4	3.3	2.6	3.6	2.7	3.9	2.7	4.5	2.9	4.6	3.0
25	2.4	1.8	2.7	2.3	3.0	2.4	3.3	2.6	3.6	2.7	3.9	2.7	4.5	2.8	4.6	3.0
27	2.4	1.8	2.7	2.3	3.0	2.4	3.3	2.6	3.6	2.7	3.9	2.7	4.4	2.8	4.5	2.9
30	2.4	1.8	2.7	2.3	3.0	2.4	3.3	2.6	3.6	2.7	3.9	2.7	4.3	2.8	4.4	2.9
33	2.4	1.8	2.7	2.3	3.0	2.4	3.3	2.6	3.6	2.7	3.9	2.7	4.2	2.7	4.3	2.9
35	2.4	1.8	2.7	2.3	3.0	2.4	3.3	2.6	3.6	2.7	3.9	2.7	4.1	2.7	4.2	2.8
37	2.4	1.8	2.7	2.3	3.0	2.4	3.3	2.6	3.6	2.7	3.9	2.7	4.1	2.7	4.1	2.8
40	2.4	1.8	2.7	2.3	3.0	2.4	3.3	2.6	3.6	2.7	3.8	2.7	4.0	2.6	4.0	2.8
43	2.4	1.8	2.7	2.3	3.0	2.4	3.3	2.6	3.6	2.7	3.7	2.7	3.9	2.6	3.9	2.7
46	2.4	1.8	2.7	2.3	3.0	2.4	3.3	2.6	3.5	2.6	3.6	2.6	3.8	2.6	3.8	2.7

TC : 总制冷量 (Total Capacity) kW.

SHC : 显热制冷量 (Sensible Heat Capacity) kW.



机器选型

机器选型

### ■ 型号 : AUQB045

### 制冷能力

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	3.0	2.2	3.3	2.7	3.7	2.8	4.1	3.1	4.5	3.2	4.9	3.3	5.6	3.4	6.0	3.7
15	3.0	2.2	3.3	2.7	3.7	2.8	4.1	3.1	4.5	3.2	4.9	3.3	5.6	3.4	6.0	3.7
21	3.0	2.2	3.3	2.7	3.7	2.8	4.1	3.1	4.5	3.2	4.9	3.3	5.6	3.4	5.9	3.6
23	3.0	2.2	3.3	2.7	3.7	2.8	4.1	3.1	4.5	3.2	4.9	3.3	5.6	3.4	5.8	3.6
25	3.0	2.2	3.3	2.7	3.7	2.8	4.1	3.1	4.5	3.2	4.9	3.3	5.6	3.4	5.7	3.6
27	3.0	2.2	3.3	2.7	3.7	2.8	4.1	3.1	4.5	3.2	4.9	3.3	5.5	3.4	5.6	3.5
30	3.0	2.2	3.3	2.7	3.7	2.8	4.1	3.1	4.5	3.2	4.9	3.3	5.4	3.3	5.5	3.5
33	3.0	2.2	3.3	2.7	3.7	2.8	4.1	3.1	4.5	3.2	4.9	3.3	5.3	3.3	5.4	3.4
35	3.0	2.2	3.3	2.7	3.7	2.8	4.1	3.1	4.5	3.2	4.9	3.3	5.2	3.2	5.3	3.4
37	3.0	2.2	3.3	2.7	3.7	2.8	4.1	3.1	4.5	3.2	4.9	3.3	5.1	3.2	5.2	3.4
40	3.0	2.2	3.3	2.7	3.7	2.8	4.1	3.1	4.5	3.2	4.8	3.3	5.0	3.2	5.1	3.3
43	3.0	2.2	3.3	2.7	3.7	2.8	4.1	3.1	4.5	3.2	4.6	3.2	4.8	3.1	4.9	3.3
46	3.0	2.2	3.3	2.7	3.7	2.8	4.1	3.1	4.4	3.2	4.5	3.1	4.7	3.1	4.8	3.2

### ■ 型号 : AUQB056

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	3.7	2.7	4.2	3.3	4.6	3.4	5.1	3.7	5.6	3.9	6.1	4.0	7.0	4.2	7.5	4.5
15	3.7	2.7	4.2	3.3	4.6	3.4	5.1	3.7	5.6	3.9	6.1	4.0	7.0	4.2	7.5	4.5
21	3.7	2.7	4.2	3.3	4.6	3.4	5.1	3.7	5.6	3.9	6.1	4.0	7.0	4.2	7.3	4.4
23	3.7	2.7	4.2	3.3	4.6	3.4	5.1	3.7	5.6	3.9	6.1	4.0	7.0	4.2	7.2	4.3
25	3.7	2.7	4.2	3.3	4.6	3.4	5.1	3.7	5.6	3.9	6.1	4.0	7.0	4.1	7.1	4.3
27	3.7	2.7	4.2	3.3	4.6	3.4	5.1	3.7	5.6	3.9	6.1	4.0	6.8	4.1	7.0	4.2
30	3.7	2.7	4.2	3.3	4.6	3.4	5.1	3.7	5.6	3.9	6.1	4.0	6.7	4.0	6.8	4.2
33	3.7	2.7	4.2	3.3	4.6	3.4	5.1	3.7	5.6	3.9	6.1	4.0	6.5	4.0	6.7	4.1
35	3.7	2.7	4.2	3.3	4.6	3.4	5.1	3.7	5.6	3.9	6.1	4.0	6.4	3.9	6.5	4.1
37	3.7	2.7	4.2	3.3	4.6	3.4	5.1	3.7	5.6	3.9	6.1	4.0	6.3	3.9	6.4	4.0
40	3.7	2.7	4.2	3.3	4.6	3.4	5.1	3.7	5.6	3.9	5.9	3.9	6.2	3.8	6.3	4.0
43	3.7	2.7	4.2	3.3	4.6	3.4	5.1	3.7	5.6	3.9	5.8	3.9	6.0	3.8	6.1	3.9
46	3.7	2.7	4.2	3.3	4.6	3.4	5.1	3.7	5.5	3.8	5.6	3.8	5.8	3.7	5.9	3.9

### ■ 型号 : AUQB071

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	4.7	3.5	5.3	4.4	5.9	4.5	6.5	5.0	7.1	5.2	7.7	5.3	8.9	5.5	9.5	5.9
15	4.7	3.5	5.3	4.4	5.9	4.5	6.5	5.0	7.1	5.2	7.7	5.3	8.9	5.5	9.5	5.9
21	4.7	3.5	5.3	4.4	5.9	4.5	6.5	5.0	7.1	5.2	7.7	5.3	8.9	5.5	9.3	5.8
23	4.7	3.5	5.3	4.4	5.9	4.5	6.5	5.0	7.1	5.2	7.7	5.3	8.9	5.5	9.1	5.8
25	4.7	3.5	5.3	4.4	5.9	4.5	6.5	5.0	7.1	5.2	7.7	5.3	8.8	5.5	9.0	5.7
27	4.7	3.5	5.3	4.4	5.9	4.5	6.5	5.0	7.1	5.2	7.7	5.3	8.7	5.4	8.9	5.7
30	4.7	3.5	5.3	4.4	5.9	4.5	6.5	5.0	7.1	5.2	7.7	5.3	8.5	5.4	8.7	5.6
33	4.7	3.5	5.3	4.4	5.9	4.5	6.5	5.0	7.1	5.2	7.7	5.3	8.3	5.3	8.4	5.5
35	4.7	3.5	5.3	4.4	5.9	4.5	6.5	5.0	7.1	5.2	7.7	5.3	8.1	5.2	8.3	5.5
37	4.7	3.5	5.3	4.4	5.9	4.5	6.5	5.0	7.1	5.2	7.7	5.3	8.0	5.2	8.2	5.4
40	4.7	3.5	5.3	4.4	5.9	4.5	6.5	5.0	7.1	5.2	7.5	5.2	7.8	5.1	8.0	5.3
43	4.7	3.5	5.3	4.4	5.9	4.5	6.5	5.0	7.1	5.2	7.3	5.1	7.6	5.0	7.8	5.3
46	4.7	3.5	5.3	4.4	5.9	4.5	6.5	5.0	7.0	5.1	7.1	5.1	7.4	5.0	7.5	5.2

TC : 总制冷量 (Total Capacity) kW.  
 SHC : 显热制冷量 (Sensible Heat Capacity) kW.

## 2-7-2. 四出风嵌入式

■ 型号：AUQA056

制冷能力

机器选型

机器选型

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	3.7	3.1	4.2	3.9	4.6	4.1	5.1	4.5	5.6	4.6	6.1	4.7	7.0	4.8	7.5	5.2
15	3.7	3.1	4.2	3.9	4.6	4.1	5.1	4.5	5.6	4.6	6.1	4.7	7.0	4.8	7.5	5.2
21	3.7	3.1	4.2	3.9	4.6	4.1	5.1	4.5	5.6	4.6	6.1	4.7	7.0	4.8	7.3	5.2
23	3.7	3.1	4.2	3.9	4.6	4.1	5.1	4.5	5.6	4.6	6.1	4.7	7.0	4.8	7.2	5.1
25	3.7	3.1	4.2	3.9	4.6	4.1	5.1	4.5	5.6	4.6	6.1	4.7	7.0	4.8	7.1	5.1
27	3.7	3.1	4.2	3.9	4.6	4.1	5.1	4.5	5.6	4.6	6.1	4.7	6.8	4.8	7.0	5.0
30	3.7	3.1	4.2	3.9	4.6	4.1	5.1	4.5	5.6	4.6	6.1	4.7	6.7	4.7	6.8	5.0
33	3.7	3.1	4.2	3.9	4.6	4.1	5.1	4.5	5.6	4.6	6.1	4.7	6.5	4.7	6.7	4.9
35	3.7	3.1	4.2	3.9	4.6	4.1	5.1	4.5	5.6	4.6	6.1	4.7	6.4	4.6	6.5	4.9
37	3.7	3.1	4.2	3.9	4.6	4.1	5.1	4.5	5.6	4.6	6.1	4.7	6.3	4.6	6.4	4.9
40	3.7	3.1	4.2	3.9	4.6	4.1	5.1	4.5	5.6	4.6	5.9	4.6	6.2	4.5	6.3	4.8
43	3.7	3.1	4.2	3.9	4.6	4.1	5.1	4.5	5.6	4.6	5.8	4.6	6.0	4.5	6.1	4.8
46	3.7	3.1	4.2	3.9	4.6	4.1	5.1	4.5	5.5	4.6	5.6	4.5	5.8	4.4	5.9	4.7

■ 型号：AUQA071

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	4.7	3.8	5.3	4.8	5.9	5.0	6.5	5.5	7.1	5.6	7.7	5.7	8.9	5.9	9.5	6.4
15	4.7	3.8	5.3	4.8	5.9	5.0	6.5	5.5	7.1	5.6	7.7	5.7	8.9	5.9	9.5	6.4
21	4.7	3.8	5.3	4.8	5.9	5.0	6.5	5.5	7.1	5.6	7.7	5.7	8.9	5.9	9.3	6.3
23	4.7	3.8	5.3	4.8	5.9	5.0	6.5	5.5	7.1	5.6	7.7	5.7	8.9	5.9	9.1	6.3
25	4.7	3.8	5.3	4.8	5.9	5.0	6.5	5.5	7.1	5.6	7.7	5.7	8.8	5.9	9.0	6.2
27	4.7	3.8	5.3	4.8	5.9	5.0	6.5	5.5	7.1	5.6	7.7	5.7	8.7	5.8	8.9	6.2
30	4.7	3.8	5.3	4.8	5.9	5.0	6.5	5.5	7.1	5.6	7.7	5.7	8.5	5.8	8.7	6.1
33	4.7	3.8	5.3	4.8	5.9	5.0	6.5	5.5	7.1	5.6	7.7	5.7	8.3	5.7	8.4	6.0
35	4.7	3.8	5.3	4.8	5.9	5.0	6.5	5.5	7.1	5.6	7.7	5.7	8.1	5.7	8.3	6.0
37	4.7	3.8	5.3	4.8	5.9	5.0	6.5	5.5	7.1	5.6	7.7	5.7	8.0	5.6	8.2	5.9
40	4.7	3.8	5.3	4.8	5.9	5.0	6.5	5.5	7.1	5.6	7.5	5.7	7.8	5.6	8.0	5.9
43	4.7	3.8	5.3	4.8	5.9	5.0	6.5	5.5	7.1	5.6	7.3	5.6	7.6	5.5	7.8	5.8
46	4.7	3.8	5.3	4.8	5.9	5.0	6.5	5.5	7.0	5.6	7.1	5.5	7.4	5.4	7.5	5.7

TC：总制冷量 (Total Capacity) kW.

SHC：显热制冷量 (Sensible Heat Capacity) kW.



## 2-7-3. 小型风管式

### ■ 型号：ARQB022

### 制冷能力

机器选型

机器选型

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	1.5	1.0	1.6	1.3	1.8	1.3	2.0	1.5	2.2	1.5	2.4	1.6	2.8	1.6	3.0	1.8
15	1.5	1.0	1.6	1.3	1.8	1.3	2.0	1.5	2.2	1.5	2.4	1.6	2.8	1.6	3.0	1.8
21	1.5	1.0	1.6	1.3	1.8	1.3	2.0	1.5	2.2	1.5	2.4	1.6	2.8	1.6	2.9	1.7
23	1.5	1.0	1.6	1.3	1.8	1.3	2.0	1.5	2.2	1.5	2.4	1.6	2.8	1.6	2.8	1.7
25	1.5	1.0	1.6	1.3	1.8	1.3	2.0	1.5	2.2	1.5	2.4	1.6	2.7	1.6	2.8	1.7
27	1.5	1.0	1.6	1.3	1.8	1.3	2.0	1.5	2.2	1.5	2.4	1.6	2.7	1.6	2.7	1.7
30	1.5	1.0	1.6	1.3	1.8	1.3	2.0	1.5	2.2	1.5	2.4	1.6	2.6	1.6	2.7	1.6
33	1.5	1.0	1.6	1.3	1.8	1.3	2.0	1.5	2.2	1.5	2.4	1.6	2.6	1.6	2.6	1.6
35	1.5	1.0	1.6	1.3	1.8	1.3	2.0	1.5	2.2	1.5	2.4	1.6	2.5	1.5	2.6	1.6
37	1.5	1.0	1.6	1.3	1.8	1.3	2.0	1.5	2.2	1.5	2.4	1.6	2.5	1.5	2.5	1.6
40	1.5	1.0	1.6	1.3	1.8	1.3	2.0	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.5	1.6
43	1.5	1.0	1.6	1.3	1.8	1.3	2.0	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.4	1.5
46	1.5	1.0	1.6	1.3	1.8	1.3	2.0	1.5	2.2	1.5	2.2	1.5	2.3	1.4	2.3	1.5

### ■ 型号：ARQB028

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	1.8	1.3	2.1	1.6	2.3	1.7	2.6	1.9	2.8	1.9	3.0	2.0	3.5	2.1	3.8	2.2
15	1.8	1.3	2.1	1.6	2.3	1.7	2.6	1.9	2.8	1.9	3.0	2.0	3.5	2.1	3.8	2.2
21	1.8	1.3	2.1	1.6	2.3	1.7	2.6	1.9	2.8	1.9	3.0	2.0	3.5	2.1	3.7	2.2
23	1.8	1.3	2.1	1.6	2.3	1.7	2.6	1.9	2.8	1.9	3.0	2.0	3.5	2.1	3.6	2.2
25	1.8	1.3	2.1	1.6	2.3	1.7	2.6	1.9	2.8	1.9	3.0	2.0	3.5	2.1	3.5	2.1
27	1.8	1.3	2.1	1.6	2.3	1.7	2.6	1.9	2.8	1.9	3.0	2.0	3.4	2.0	3.5	2.1
30	1.8	1.3	2.1	1.6	2.3	1.7	2.6	1.9	2.8	1.9	3.0	2.0	3.4	2.0	3.4	2.1
33	1.8	1.3	2.1	1.6	2.3	1.7	2.6	1.9	2.8	1.9	3.0	2.0	3.3	2.0	3.3	2.0
35	1.8	1.3	2.1	1.6	2.3	1.7	2.6	1.9	2.8	1.9	3.0	2.0	3.2	1.9	3.3	2.0
37	1.8	1.3	2.1	1.6	2.3	1.7	2.6	1.9	2.8	1.9	3.0	2.0	3.2	1.9	3.2	2.0
40	1.8	1.3	2.1	1.6	2.3	1.7	2.6	1.9	2.8	1.9	3.0	1.9	3.1	1.9	3.1	2.0
43	1.8	1.3	2.1	1.6	2.3	1.7	2.6	1.9	2.8	1.9	2.9	1.9	3.0	1.9	3.1	1.9
46	1.8	1.3	2.1	1.6	2.3	1.7	2.6	1.9	2.8	1.9	2.8	1.9	2.9	1.8	3.0	1.9

TC：总制冷量 (Total Capacity) kW.

SHC：显热制冷量 (Sensible Heat Capacity) kW.



机器选型

机器选型

### ■ 型号：ARQB036

## 制冷能力

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	2.4	1.8	2.7	2.2	3.0	2.3	3.3	2.5	3.6	2.6	3.9	2.6	4.5	2.8	4.8	3.0
15	2.4	1.8	2.7	2.2	3.0	2.3	3.3	2.5	3.6	2.6	3.9	2.6	4.5	2.8	4.8	3.0
21	2.4	1.8	2.7	2.2	3.0	2.3	3.3	2.5	3.6	2.6	3.9	2.6	4.5	2.8	4.7	2.9
23	2.4	1.8	2.7	2.2	3.0	2.3	3.3	2.5	3.6	2.6	3.9	2.6	4.5	2.8	4.6	2.9
25	2.4	1.8	2.7	2.2	3.0	2.3	3.3	2.5	3.6	2.6	3.9	2.6	4.5	2.7	4.6	2.9
27	2.4	1.8	2.7	2.2	3.0	2.3	3.3	2.5	3.6	2.6	3.9	2.6	4.4	2.7	4.5	2.8
30	2.4	1.8	2.7	2.2	3.0	2.3	3.3	2.5	3.6	2.6	3.9	2.6	4.3	2.7	4.4	2.8
33	2.4	1.8	2.7	2.2	3.0	2.3	3.3	2.5	3.6	2.6	3.9	2.6	4.2	2.6	4.3	2.8
35	2.4	1.8	2.7	2.2	3.0	2.3	3.3	2.5	3.6	2.6	3.9	2.6	4.1	2.6	4.2	2.7
37	2.4	1.8	2.7	2.2	3.0	2.3	3.3	2.5	3.6	2.6	3.9	2.6	4.1	2.6	4.1	2.7
40	2.4	1.8	2.7	2.2	3.0	2.3	3.3	2.5	3.6	2.6	3.8	2.6	4.0	2.5	4.0	2.7
43	2.4	1.8	2.7	2.2	3.0	2.3	3.3	2.5	3.6	2.6	3.7	2.6	3.9	2.5	3.9	2.6
46	2.4	1.8	2.7	2.2	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.5	3.8	2.5	3.8	2.6

### ■ 型号：ARQB045

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	3.0	2.4	3.3	3.0	3.7	3.1	4.1	3.4	4.5	3.5	4.9	3.6	5.6	3.7	6.0	4.0
15	3.0	2.4	3.3	3.0	3.7	3.1	4.1	3.4	4.5	3.5	4.9	3.6	5.6	3.7	6.0	4.0
21	3.0	2.4	3.3	3.0	3.7	3.1	4.1	3.4	4.5	3.5	4.9	3.6	5.6	3.7	5.9	4.0
23	3.0	2.4	3.3	3.0	3.7	3.1	4.1	3.4	4.5	3.5	4.9	3.6	5.6	3.7	5.8	3.9
25	3.0	2.4	3.3	3.0	3.7	3.1	4.1	3.4	4.5	3.5	4.9	3.6	5.6	3.7	5.7	3.9
27	3.0	2.4	3.3	3.0	3.7	3.1	4.1	3.4	4.5	3.5	4.9	3.6	5.5	3.7	5.6	3.9
30	3.0	2.4	3.3	3.0	3.7	3.1	4.1	3.4	4.5	3.5	4.9	3.6	5.4	3.6	5.5	3.8
33	3.0	2.4	3.3	3.0	3.7	3.1	4.1	3.4	4.5	3.5	4.9	3.6	5.3	3.6	5.4	3.8
35	3.0	2.4	3.3	3.0	3.7	3.1	4.1	3.4	4.5	3.5	4.9	3.6	5.2	3.5	5.3	3.7
37	3.0	2.4	3.3	3.0	3.7	3.1	4.1	3.4	4.5	3.5	4.9	3.6	5.1	3.5	5.2	3.7
40	3.0	2.4	3.3	3.0	3.7	3.1	4.1	3.4	4.5	3.5	4.8	3.6	5.0	3.5	5.1	3.7
43	3.0	2.4	3.3	3.0	3.7	3.1	4.1	3.4	4.5	3.5	4.6	3.5	4.8	3.4	4.9	3.6
46	3.0	2.4	3.3	3.0	3.7	3.1	4.1	3.4	4.4	3.5	4.5	3.5	4.7	3.4	4.8	3.6

### ■ 型号：ARQB056

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	3.7	2.9	4.2	3.7	4.6	3.8	5.1	4.2	5.6	4.3	6.1	4.4	7.0	4.6	7.5	4.9
15	3.7	2.9	4.2	3.7	4.6	3.8	5.1	4.2	5.6	4.3	6.1	4.4	7.0	4.6	7.5	4.9
21	3.7	2.9	4.2	3.7	4.6	3.8	5.1	4.2	5.6	4.3	6.1	4.4	7.0	4.6	7.3	4.8
23	3.7	2.9	4.2	3.7	4.6	3.8	5.1	4.2	5.6	4.3	6.1	4.4	7.0	4.6	7.2	4.8
25	3.7	2.9	4.2	3.7	4.6	3.8	5.1	4.2	5.6	4.3	6.1	4.4	7.0	4.5	7.1	4.7
27	3.7	2.9	4.2	3.7	4.6	3.8	5.1	4.2	5.6	4.3	6.1	4.4	6.8	4.5	7.0	4.7
30	3.7	2.9	4.2	3.7	4.6	3.8	5.1	4.2	5.6	4.3	6.1	4.4	6.7	4.4	6.8	4.6
33	3.7	2.9	4.2	3.7	4.6	3.8	5.1	4.2	5.6	4.3	6.1	4.4	6.5	4.4	6.7	4.6
35	3.7	2.9	4.2	3.7	4.6	3.8	5.1	4.2	5.6	4.3	6.1	4.4	6.4	4.3	6.5	4.5
37	3.7	2.9	4.2	3.7	4.6	3.8	5.1	4.2	5.6	4.3	6.1	4.4	6.3	4.3	6.4	4.5
40	3.7	2.9	4.2	3.7	4.6	3.8	5.1	4.2	5.6	4.3	5.9	4.3	6.2	4.2	6.3	4.5
43	3.7	2.9	4.2	3.7	4.6	3.8	5.1	4.2	5.6	4.3	5.8	4.3	6.0	4.2	6.1	4.4
46	3.7	2.9	4.2	3.7	4.6	3.8	5.1	4.2	5.5	4.3	5.6	4.2	5.8	4.1	5.9	4.3

TC : 总制冷量 (Total Capacity) kW.

SHC : 显热制冷量 (Sensible Heat Capacity) kW.

## 2-7-4. 低静压风管式

### ■ 型号：ARQB071

### 制冷能力

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	4.7	4.1	5.3	5.1	5.9	5.3	6.5	5.9	7.1	6.0	7.7	6.1	8.9	6.3	9.5	6.8
15	4.7	4.1	5.3	5.1	5.9	5.3	6.5	5.9	7.1	6.0	7.7	6.1	8.9	6.3	9.5	6.8
21	4.7	4.1	5.3	5.1	5.9	5.3	6.5	5.9	7.1	6.0	7.7	6.1	8.9	6.3	9.3	6.7
23	4.7	4.1	5.3	5.1	5.9	5.3	6.5	5.9	7.1	6.0	7.7	6.1	8.9	6.3	9.1	6.7
25	4.7	4.1	5.3	5.1	5.9	5.3	6.5	5.9	7.1	6.0	7.7	6.1	8.8	6.3	9.0	6.6
27	4.7	4.1	5.3	5.1	5.9	5.3	6.5	5.9	7.1	6.0	7.7	6.1	8.7	6.2	8.9	6.6
30	4.7	4.1	5.3	5.1	5.9	5.3	6.5	5.9	7.1	6.0	7.7	6.1	8.5	6.1	8.7	6.5
33	4.7	4.1	5.3	5.1	5.9	5.3	6.5	5.9	7.1	6.0	7.7	6.1	8.3	6.1	8.4	6.4
35	4.7	4.1	5.3	5.1	5.9	5.3	6.5	5.9	7.1	6.0	7.7	6.1	8.1	6.0	8.3	6.4
37	4.7	4.1	5.3	5.1	5.9	5.3	6.5	5.9	7.1	6.0	7.7	6.1	8.0	6.0	8.2	6.3
40	4.7	4.1	5.3	5.1	5.9	5.3	6.5	5.9	7.1	6.0	7.5	6.0	7.8	5.9	8.0	6.3
43	4.7	4.1	5.3	5.1	5.9	5.3	6.5	5.9	7.1	6.0	7.3	6.0	7.6	5.9	7.8	6.2
46	4.7	4.1	5.3	5.1	5.9	5.3	6.5	5.9	7.0	6.0	7.1	5.9	7.4	5.8	7.5	6.1

### ■ 型号：ARQB090

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	5.9	4.7	6.7	5.9	7.5	6.1	8.2	6.8	9.0	6.9	9.7	7.1	11.3	7.4	12.1	7.9
15	5.9	4.7	6.7	5.9	7.5	6.1	8.2	6.8	9.0	6.9	9.7	7.1	11.3	7.4	12.1	7.9
21	5.9	4.7	6.7	5.9	7.5	6.1	8.2	6.8	9.0	6.9	9.7	7.1	11.3	7.4	11.7	7.8
23	5.9	4.7	6.7	5.9	7.5	6.1	8.2	6.8	9.0	6.9	9.7	7.1	11.3	7.4	11.5	7.7
25	5.9	4.7	6.7	5.9	7.5	6.1	8.2	6.8	9.0	6.9	9.7	7.1	11.2	7.3	11.4	7.7
27	5.9	4.7	6.7	5.9	7.5	6.1	8.2	6.8	9.0	6.9	9.7	7.1	11.0	7.2	11.2	7.6
30	5.9	4.7	6.7	5.9	7.5	6.1	8.2	6.8	9.0	6.9	9.7	7.1	10.8	7.2	11.0	7.5
33	5.9	4.7	6.7	5.9	7.5	6.1	8.2	6.8	9.0	6.9	9.7	7.1	10.5	7.1	10.7	7.4
35	5.9	4.7	6.7	5.9	7.5	6.1	8.2	6.8	9.0	6.9	9.7	7.1	10.3	7.0	10.5	7.4
37	5.9	4.7	6.7	5.9	7.5	6.1	8.2	6.8	9.0	6.9	9.7	7.1	10.2	6.9	10.4	7.3
40	5.9	4.7	6.7	5.9	7.5	6.1	8.2	6.8	9.0	6.9	9.5	7.0	9.9	6.9	10.1	7.2
43	5.9	4.7	6.7	5.9	7.5	6.1	8.2	6.8	9.0	6.9	9.3	6.9	9.6	6.8	9.8	7.1
46	5.9	4.7	6.7	5.9	7.5	6.1	8.2	6.8	8.8	6.9	9.0	6.8	9.4	6.7	9.6	7.0

### ■ 型号：ARQB112

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	7.4	5.6	8.3	6.9	9.3	7.2	10.2	7.9	11.2	8.2	12.1	8.3	14.0	8.7	15.0	9.3
15	7.4	5.6	8.3	6.9	9.3	7.2	10.2	7.9	11.2	8.2	12.1	8.3	14.0	8.7	15.0	9.3
21	7.4	5.6	8.3	6.9	9.3	7.2	10.2	7.9	11.2	8.2	12.1	8.3	14.0	8.7	14.6	9.2
23	7.4	5.6	8.3	6.9	9.3	7.2	10.2	7.9	11.2	8.2	12.1	8.3	14.0	8.7	14.4	9.1
25	7.4	5.6	8.3	6.9	9.3	7.2	10.2	7.9	11.2	8.2	12.1	8.3	13.9	8.7	14.2	9.0
27	7.4	5.6	8.3	6.9	9.3	7.2	10.2	7.9	11.2	8.2	12.1	8.3	13.7	8.6	14.0	8.9
30	7.4	5.6	8.3	6.9	9.3	7.2	10.2	7.9	11.2	8.2	12.1	8.3	13.4	8.4	13.6	8.8
33	7.4	5.6	8.3	6.9	9.3	7.2	10.2	7.9	11.2	8.2	12.1	8.3	13.1	8.3	13.3	8.7
35	7.4	5.6	8.3	6.9	9.3	7.2	10.2	7.9	11.2	8.2	12.1	8.3	12.8	8.2	13.1	8.6
37	7.4	5.6	8.3	6.9	9.3	7.2	10.2	7.9	11.2	8.2	12.1	8.3	12.6	8.2	12.9	8.5
40	7.4	5.6	8.3	6.9	9.3	7.2	10.2	7.9	11.2	8.2	11.8	8.2	12.3	8.0	12.6	8.4
43	7.4	5.6	8.3	6.9	9.3	7.2	10.2	7.9	11.2	8.2	11.5	8.1	12.0	7.9	12.2	8.3
46	7.4	5.6	8.3	6.9	9.3	7.2	10.2	7.9	11.0	8.1	11.2	8.0	11.7	7.8	11.9	8.2

### ■ 型号：ARQB125

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	8.2	6.1	9.3	7.6	10.4	7.9	11.4	8.7	12.5	8.9	13.5	9.2	15.7	9.6	16.7	10.3
15	8.2	6.1	9.3	7.6	10.4	7.9	11.4	8.7	12.5	8.9	13.5	9.2	15.7	9.6	16.7	10.3
21	8.2	6.1	9.3	7.6	10.4	7.9	11.4	8.7	12.5	8.9	13.5	9.2	15.7	9.6	16.3	10.1
23	8.2	6.1	9.3	7.6	10.4	7.9	11.4	8.7	12.5	8.9	13.5	9.2	15.7	9.6	16.0	10.0
25	8.2	6.1	9.3	7.6	10.4	7.9	11.4	8.7	12.5	8.9	13.5	9.2	15.5	9.5	15.8	9.9
27	8.2	6.1	9.3	7.6	10.4	7.9	11.4	8.7	12.5	8.9	13.5	9.2	15.3	9.4	15.6	9.8
30	8.2	6.1	9.3	7.6	10.4	7.9	11.4	8.7	12.5	8.9	13.5	9.2	15.0	9.3	15.2	9.7
33	8.2	6.1	9.3	7.6	10.4	7.9	11.4	8.7	12.5	8.9	13.5	9.2	14.6	9.1	14.9	9.5
35	8.2	6.1	9.3	7.6	10.4	7.9	11.4	8.7	12.5	8.9	13.5	9.2	14.3	9.0	14.6	9.4
37	8.2	6.1	9.3	7.6	10.4	7.9	11.4	8.7	12.5	8.9	13.5	9.2	14.1	9.0	14.4	9.4
40	8.2	6.1	9.3	7.6	10.4	7.9	11.4	8.7	12.5	8.9	13.2	9.0	13.8	8.8	14.0	9.2
43	8.2	6.1	9.3	7.6	10.4	7.9	11.4	8.7	12.5	8.9	12.9	8.9	13.4	8.7	13.7	9.1
46	8.2	6.1	9.3	7.6	10.4	7.9	11.4	8.7	12.3	8.9	12.5	8.8	13.0	8.6	13.3	9.0

TC : 总制冷量 (Total Capacity) kW.

SHC : 显热制冷量 (Sensible Heat Capacity) kW.





## 2-7-6. 高静压风管式

### ■ 型号：ARQC112

### 制冷能力

机器选型

机器选型

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	7.4	6.0	8.3	7.4	9.3	7.7	10.2	8.5	11.2	8.8	12.1	8.9	14.0	9.3	15.0	10.0
15	7.4	6.0	8.3	7.4	9.3	7.7	10.2	8.5	11.2	8.8	12.1	8.9	14.0	9.3	15.0	10.0
21	7.4	6.0	8.3	7.4	9.3	7.7	10.2	8.5	11.2	8.8	12.1	8.9	14.0	9.3	14.6	9.8
23	7.4	6.0	8.3	7.4	9.3	7.7	10.2	8.5	11.2	8.8	12.1	8.9	14.0	9.3	14.4	9.7
25	7.4	6.0	8.3	7.4	9.3	7.7	10.2	8.5	11.2	8.8	12.1	8.9	13.9	9.2	14.2	9.7
27	7.4	6.0	8.3	7.4	9.3	7.7	10.2	8.5	11.2	8.8	12.1	8.9	13.7	9.1	14.0	9.6
30	7.4	6.0	8.3	7.4	9.3	7.7	10.2	8.5	11.2	8.8	12.1	8.9	13.4	9.0	13.6	9.5
33	7.4	6.0	8.3	7.4	9.3	7.7	10.2	8.5	11.2	8.8	12.1	8.9	13.1	8.9	13.3	9.4
35	7.4	6.0	8.3	7.4	9.3	7.7	10.2	8.5	11.2	8.8	12.1	8.9	12.8	8.8	13.1	9.3
37	7.4	6.0	8.3	7.4	9.3	7.7	10.2	8.5	11.2	8.8	12.1	8.9	12.6	8.7	12.9	9.2
40	7.4	6.0	8.3	7.4	9.3	7.7	10.2	8.5	11.2	8.8	11.8	8.8	12.3	8.6	12.6	9.1
43	7.4	6.0	8.3	7.4	9.3	7.7	10.2	8.5	11.2	8.8	11.5	8.7	12.0	8.5	12.2	9.0
46	7.4	6.0	8.3	7.4	9.3	7.7	10.2	8.5	11.0	8.6	11.2	8.6	11.7	8.4	11.9	8.9

### ■ 型号：ARQC125

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	8.2	7.3	9.3	9.2	10.4	9.5	11.4	10.5	12.5	10.8	13.5	10.9	15.7	11.3	16.7	12.2
15	8.2	7.3	9.3	9.2	10.4	9.5	11.4	10.5	12.5	10.8	13.5	10.9	15.7	11.3	16.7	12.2
21	8.2	7.3	9.3	9.2	10.4	9.5	11.4	10.5	12.5	10.8	13.5	10.9	15.7	11.3	16.3	12.0
23	8.2	7.3	9.3	9.2	10.4	9.5	11.4	10.5	12.5	10.8	13.5	10.9	15.7	11.3	16.0	11.9
25	8.2	7.3	9.3	9.2	10.4	9.5	11.4	10.5	12.5	10.8	13.5	10.9	15.5	11.2	15.8	11.8
27	8.2	7.3	9.3	9.2	10.4	9.5	11.4	10.5	12.5	10.8	13.5	10.9	15.3	11.1	15.6	11.8
30	8.2	7.3	9.3	9.2	10.4	9.5	11.4	10.5	12.5	10.8	13.5	10.9	15.0	11.0	15.2	11.6
33	8.2	7.3	9.3	9.2	10.4	9.5	11.4	10.5	12.5	10.8	13.5	10.9	14.6	10.9	14.9	11.5
35	8.2	7.3	9.3	9.2	10.4	9.5	11.4	10.5	12.5	10.8	13.5	10.9	14.3	10.8	14.6	11.4
37	8.2	7.3	9.3	9.2	10.4	9.5	11.4	10.5	12.5	10.8	13.5	10.9	14.1	10.7	14.4	11.4
40	8.2	7.3	9.3	9.2	10.4	9.5	11.4	10.5	12.5	10.8	13.2	10.8	13.8	10.6	14.0	11.3
43	8.2	7.3	9.3	9.2	10.4	9.5	11.4	10.5	12.5	10.8	12.9	10.7	13.4	10.5	13.7	11.2
46	8.2	7.3	9.3	9.2	10.4	9.5	11.4	10.5	12.3	10.6	12.5	10.6	13.0	10.4	13.3	11.1

### ■ 型号：ARQC180

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	11.8	9.8	13.4	12.2	14.9	12.6	16.5	13.9	18.0	14.3	19.5	14.6	22.6	15.1	24.1	16.2
15	11.8	9.8	13.4	12.2	14.9	12.6	16.5	13.9	18.0	14.3	19.5	14.6	22.6	15.1	24.1	16.2
21	11.8	9.8	13.4	12.2	14.9	12.6	16.5	13.9	18.0	14.3	19.5	14.6	22.6	15.1	23.5	16.0
23	11.8	9.8	13.4	12.2	14.9	12.6	16.5	13.9	18.0	14.3	19.5	14.6	22.6	15.1	23.1	15.9
25	11.8	9.8	13.4	12.2	14.9	12.6	16.5	13.9	18.0	14.3	19.5	14.6	22.4	15.0	22.8	15.8
27	11.8	9.8	13.4	12.2	14.9	12.6	16.5	13.9	18.0	14.3	19.5	14.6	22.0	14.8	22.4	15.6
30	11.8	9.8	13.4	12.2	14.9	12.6	16.5	13.9	18.0	14.3	19.5	14.6	21.5	14.7	21.9	15.5
33	11.8	9.8	13.4	12.2	14.9	12.6	16.5	13.9	18.0	14.3	19.5	14.6	21.0	14.5	21.4	15.3
35	11.8	9.8	13.4	12.2	14.9	12.6	16.5	13.9	18.0	14.3	19.5	14.6	20.6	14.4	21.0	15.1
37	11.8	9.8	13.4	12.2	14.9	12.6	16.5	13.9	18.0	14.3	19.5	14.6	20.3	14.3	20.7	15.1
40	11.8	9.8	13.4	12.2	14.9	12.6	16.5	13.9	18.0	14.3	19.0	14.4	19.8	14.1	20.2	14.9
43	11.8	9.8	13.4	12.2	14.9	12.6	16.5	13.9	18.0	14.3	18.5	14.2	19.3	13.9	19.7	14.7
46	11.8	9.8	13.4	12.2	14.9	12.6	16.5	13.9	17.7	14.0	18.0	14.1	18.8	13.8	19.1	14.6

TC : 总制冷量 (Total Capacity) kW.

SHC : 显热制冷量 (Sensible Heat Capacity) kW.



机器选型

机器选型

### ■ 型号：ARQC224

## 制冷能力

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	14.7	12.1	16.6	15.1	18.6	15.7	20.5	17.3	22.4	17.8	24.2	18.1	28.1	18.8	30.0	20.2
15	14.7	12.1	16.6	15.1	18.6	15.7	20.5	17.3	22.4	17.8	24.2	18.1	28.1	18.8	30.0	20.2
21	14.7	12.1	16.6	15.1	18.6	15.7	20.5	17.3	22.4	17.8	24.2	18.1	28.1	18.8	29.2	20.0
23	14.7	12.1	16.6	15.1	18.6	15.7	20.5	17.3	22.4	17.8	24.2	18.1	28.1	18.8	28.7	19.8
25	14.7	12.1	16.6	15.1	18.6	15.7	20.5	17.3	22.4	17.8	24.2	18.1	27.8	18.7	28.3	19.6
27	14.7	12.1	16.6	15.1	18.6	15.7	20.5	17.3	22.4	17.8	24.2	18.1	27.4	18.5	27.9	19.5
30	14.7	12.1	16.6	15.1	18.6	15.7	20.5	17.3	22.4	17.8	24.2	18.1	26.8	18.3	27.3	19.2
33	14.7	12.1	16.6	15.1	18.6	15.7	20.5	17.3	22.4	17.8	24.2	18.1	26.2	18.1	26.6	19.0
35	14.7	12.1	16.6	15.1	18.6	15.7	20.5	17.3	22.4	17.8	24.2	18.1	25.7	17.9	26.2	18.8
37	14.7	12.1	16.6	15.1	18.6	15.7	20.5	17.3	22.4	17.8	24.2	18.1	25.3	17.8	25.8	18.7
40	14.7	12.1	16.6	15.1	18.6	15.7	20.5	17.3	22.4	17.8	23.7	17.9	24.6	17.6	25.1	18.5
43	14.7	12.1	16.6	15.1	18.6	15.7	20.5	17.3	22.4	17.8	23.0	17.7	24.0	17.4	24.5	18.3
46	14.7	12.1	16.6	15.1	18.6	15.7	20.5	17.3	22.0	17.5	22.4	17.5	23.4	17.2	23.8	18.1

### ■ 型号：ARQC250

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	16.4	12.6	18.6	15.6	20.7	16.2	22.9	17.9	25.0	18.4	27.1	18.8	31.3	19.6	33.5	21.1
15	16.4	12.6	18.6	15.6	20.7	16.2	22.9	17.9	25.0	18.4	27.1	18.8	31.3	19.6	33.5	21.1
21	16.4	12.6	18.6	15.6	20.7	16.2	22.9	17.9	25.0	18.4	27.1	18.8	31.3	19.6	32.6	20.8
23	16.4	12.6	18.6	15.6	20.7	16.2	22.9	17.9	25.0	18.4	27.1	18.8	31.3	19.6	32.1	20.5
25	16.4	12.6	18.6	15.6	20.7	16.2	22.9	17.9	25.0	18.4	27.1	18.8	31.1	19.5	31.6	20.3
27	16.4	12.6	18.6	15.6	20.7	16.2	22.9	17.9	25.0	18.4	27.1	18.8	30.5	19.3	31.2	20.2
30	16.4	12.6	18.6	15.6	20.7	16.2	22.9	17.9	25.0	18.4	27.1	18.8	29.9	19.0	30.4	19.9
33	16.4	12.6	18.6	15.6	20.7	16.2	22.9	17.9	25.0	18.4	27.1	18.8	29.2	18.8	29.7	19.6
35	16.4	12.6	18.6	15.6	20.7	16.2	22.9	17.9	25.0	18.4	27.1	18.8	28.7	18.6	29.2	19.4
37	16.4	12.6	18.6	15.6	20.7	16.2	22.9	17.9	25.0	18.4	27.1	18.8	28.2	18.4	28.8	19.3
40	16.4	12.6	18.6	15.6	20.7	16.2	22.9	17.9	25.0	18.4	26.4	18.6	27.5	18.2	28.0	19.1
43	16.4	12.6	18.6	15.6	20.7	16.2	22.9	17.9	25.0	18.4	25.7	18.3	26.8	17.9	27.3	18.8
46	16.4	12.6	18.6	15.6	20.7	16.2	22.9	17.9	24.6	18.1	25.0	18.1	26.1	17.7	26.5	18.6

获取更多资料 微信搜索 暖通空调

TC : 总制冷量 (Total Capacity) kW.  
SHC : 显热制冷量 (Sensible Heat Capacity) kW.









## 2-7-11. 挂壁式

### ■ 型号：ASQA056

### 制冷能力

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	3.7	2.9	4.2	3.5	4.6	3.7	5.1	4.1	5.6	4.2	6.1	4.3	7.0	4.4	7.5	4.8
15	3.7	2.9	4.2	3.5	4.6	3.7	5.1	4.1	5.6	4.2	6.1	4.3	7.0	4.4	7.5	4.8
21	3.7	2.9	4.2	3.5	4.6	3.7	5.1	4.1	5.6	4.2	6.1	4.3	7.0	4.4	7.3	4.7
23	3.7	2.9	4.2	3.5	4.6	3.7	5.1	4.1	5.6	4.2	6.1	4.3	7.0	4.4	7.2	4.7
25	3.7	2.9	4.2	3.5	4.6	3.7	5.1	4.1	5.6	4.2	6.1	4.3	7.0	4.4	7.1	4.6
27	3.7	2.9	4.2	3.5	4.6	3.7	5.1	4.1	5.6	4.2	6.1	4.3	6.8	4.4	7.0	4.6
30	3.7	2.9	4.2	3.5	4.6	3.7	5.1	4.1	5.6	4.2	6.1	4.3	6.7	4.3	6.8	4.5
33	3.7	2.9	4.2	3.5	4.6	3.7	5.1	4.1	5.6	4.2	6.1	4.3	6.5	4.3	6.7	4.5
35	3.7	2.9	4.2	3.5	4.6	3.7	5.1	4.1	5.6	4.2	6.1	4.3	6.4	4.2	6.5	4.4
37	3.7	2.9	4.2	3.5	4.6	3.7	5.1	4.1	5.6	4.2	6.1	4.3	6.3	4.2	6.4	4.4
40	3.7	2.9	4.2	3.5	4.6	3.7	5.1	4.1	5.6	4.2	5.9	4.2	6.2	4.1	6.3	4.3
43	3.7	2.9	4.2	3.5	4.6	3.7	5.1	4.1	5.6	4.2	5.8	4.2	6.0	4.1	6.1	4.3
46	3.7	2.9	4.2	3.5	4.6	3.7	5.1	4.1	5.5	4.2	5.6	4.1	5.8	4.0	5.9	4.2

### ■ 型号：ASQA071

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	4.7	3.4	5.3	4.2	5.9	4.4	6.5	4.9	7.1	5.0	7.7	5.1	8.9	5.4	9.5	5.8
15	4.7	3.4	5.3	4.2	5.9	4.4	6.5	4.9	7.1	5.0	7.7	5.1	8.9	5.4	9.5	5.8
21	4.7	3.4	5.3	4.2	5.9	4.4	6.5	4.9	7.1	5.0	7.7	5.1	8.9	5.4	9.3	5.7
23	4.7	3.4	5.3	4.2	5.9	4.4	6.5	4.9	7.1	5.0	7.7	5.1	8.9	5.4	9.1	5.6
25	4.7	3.4	5.3	4.2	5.9	4.4	6.5	4.9	7.1	5.0	7.7	5.1	8.8	5.3	9.0	5.5
27	4.7	3.4	5.3	4.2	5.9	4.4	6.5	4.9	7.1	5.0	7.7	5.1	8.7	5.3	8.9	5.5
30	4.7	3.4	5.3	4.2	5.9	4.4	6.5	4.9	7.1	5.0	7.7	5.1	8.5	5.2	8.7	5.4
33	4.7	3.4	5.3	4.2	5.9	4.4	6.5	4.9	7.1	5.0	7.7	5.1	8.3	5.1	8.4	5.3
35	4.7	3.4	5.3	4.2	5.9	4.4	6.5	4.9	7.1	5.0	7.7	5.1	8.1	5.1	8.3	5.3
37	4.7	3.4	5.3	4.2	5.9	4.4	6.5	4.9	7.1	5.0	7.7	5.1	8.0	5.0	8.2	5.2
40	4.7	3.4	5.3	4.2	5.9	4.4	6.5	4.9	7.1	5.0	7.5	5.1	7.8	4.9	8.0	5.2
43	4.7	3.4	5.3	4.2	5.9	4.4	6.5	4.9	7.1	5.0	7.3	5.0	7.6	4.9	7.8	5.1
46	4.7	3.4	5.3	4.2	5.9	4.4	6.5	4.9	7.0	5.0	7.1	4.9	7.4	4.8	7.5	5.0

### ■ 型号：ASQA080

室外温度 (° CDB)	室内温度															
	20° CDB / 15° CWB		23° CDB / 16° CWB		24° CDB / 17° CWB		26° CDB / 18° CWB		27° CDB / 19° CWB		28° CDB / 20° CWB		30° CDB / 22° CWB		32° CDB / 23° CWB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
10	5.3	3.8	5.9	4.6	6.6	4.8	7.3	5.3	8.0	5.5	8.7	5.6	10.0	5.9	10.7	6.3
15	5.3	3.8	5.9	4.6	6.6	4.8	7.3	5.3	8.0	5.5	8.7	5.6	10.0	5.9	10.7	6.3
21	5.3	3.8	5.9	4.6	6.6	4.8	7.3	5.3	8.0	5.5	8.7	5.6	10.0	5.9	10.4	6.2
23	5.3	3.8	5.9	4.6	6.6	4.8	7.3	5.3	8.0	5.5	8.7	5.6	10.0	5.9	10.3	6.1
25	5.3	3.8	5.9	4.6	6.6	4.8	7.3	5.3	8.0	5.5	8.7	5.6	9.9	5.9	10.1	6.1
27	5.3	3.8	5.9	4.6	6.6	4.8	7.3	5.3	8.0	5.5	8.7	5.6	9.8	5.8	10.0	6.0
30	5.3	3.8	5.9	4.6	6.6	4.8	7.3	5.3	8.0	5.5	8.7	5.6	9.6	5.7	9.7	5.9
33	5.3	3.8	5.9	4.6	6.6	4.8	7.3	5.3	8.0	5.5	8.7	5.6	9.3	5.6	9.5	5.8
35	5.3	3.8	5.9	4.6	6.6	4.8	7.3	5.3	8.0	5.5	8.7	5.6	9.2	5.5	9.3	5.8
37	5.3	3.8	5.9	4.6	6.6	4.8	7.3	5.3	8.0	5.5	8.7	5.6	9.0	5.5	9.2	5.7
40	5.3	3.8	5.9	4.6	6.6	4.8	7.3	5.3	8.0	5.5	8.5	5.5	8.8	5.4	9.0	5.6
43	5.3	3.8	5.9	4.6	6.6	4.8	7.3	5.3	8.0	5.5	8.2	5.5	8.6	5.3	8.7	5.5
46	5.3	3.8	5.9	4.6	6.6	4.8	7.3	5.3	7.9	5.4	8.0	5.4	8.3	5.2	8.5	5.4

TC : 总制冷量 (Total Capacity) kW.

SHC : 显热制冷量 (Sensible Heat Capacity) kW.



## 2-8. 制热能力一览表 (室内机)

### 2-8-1. 小型四出风嵌入式

#### 制热能力

#### ■ 型号 : AUQB022

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4
-15.0	-16.0	1.6	1.6	1.6	1.6	1.6	1.6	1.6
-12.0	-13.0	1.8	1.8	1.8	1.8	1.8	1.8	1.8
-9.0	-10.0	2.0	2.0	2.0	2.0	2.0	2.0	1.9
-7.0	-8.0	2.1	2.1	2.1	2.1	2.1	2.1	2.1
-5.0	-6.0	2.3	2.2	2.2	2.2	2.2	2.2	2.2
-3.0	-4.0	2.4	2.4	2.4	2.4	2.4	2.3	2.2
-1.0	-2.0	2.5	2.5	2.5	2.5	2.5	2.4	2.2
0.0	-1.0	2.6	2.6	2.6	2.6	2.6	2.4	2.2
2.0	1.0	2.7	2.7	2.7	2.7	2.6	2.4	2.2
5.0	4.0	3.0	2.9	2.8	2.7	2.6	2.4	2.2
7.0	6.0	3.1	3.0	2.8	2.7	2.6	2.4	2.2
9.0	7.8	3.2	3.0	2.8	2.7	2.6	2.4	2.2
12.0	10.6	3.2	3.0	2.8	2.7	2.6	2.4	2.2
15.0	13.5	3.2	3.0	2.8	2.7	2.6	2.4	2.2

#### ■ 型号 : AUQB028

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	1.6	1.6	1.6	1.6	1.6	1.6	1.5
-15.0	-16.0	1.8	1.8	1.8	1.8	1.8	1.8	1.8
-12.0	-13.0	2.1	2.1	2.0	2.0	2.0	2.0	2.0
-9.0	-10.0	2.3	2.3	2.3	2.2	2.2	2.2	2.2
-7.0	-8.0	2.4	2.4	2.4	2.4	2.4	2.4	2.4
-5.0	-6.0	2.6	2.6	2.5	2.5	2.5	2.5	2.5
-3.0	-4.0	2.7	2.7	2.7	2.7	2.7	2.7	2.5
-1.0	-2.0	2.9	2.9	2.9	2.9	2.8	2.7	2.5
0.0	-1.0	3.0	3.0	2.9	2.9	2.9	2.7	2.5
2.0	1.0	3.1	3.1	3.1	3.0	2.9	2.7	2.5
5.0	4.0	3.4	3.4	3.2	3.1	3.0	2.8	2.5
7.0	6.0	3.5	3.4	3.2	3.1	3.0	2.8	2.6
9.0	7.8	3.6	3.4	3.2	3.1	3.0	2.8	2.6
12.0	10.6	3.6	3.4	3.2	3.1	3.0	2.8	2.6
15.0	13.5	3.6	3.4	3.2	3.1	3.0	2.8	2.6

#### ■ 型号 : AUQB036

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
-15.0	-16.0	2.4	2.4	2.3	2.3	2.3	2.3	2.3
-12.0	-13.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6
-9.0	-10.0	2.9	2.9	2.9	2.9	2.9	2.9	2.9
-7.0	-8.0	3.1	3.1	3.1	3.1	3.1	3.0	3.0
-5.0	-6.0	3.3	3.3	3.3	3.3	3.3	3.2	3.1
-3.0	-4.0	3.5	3.5	3.5	3.4	3.4	3.4	3.2
-1.0	-2.0	3.7	3.7	3.7	3.7	3.6	3.5	3.2
0.0	-1.0	3.8	3.8	3.8	3.7	3.7	3.5	3.2
2.0	1.0	4.0	4.0	4.0	3.9	3.8	3.5	3.2
5.0	4.0	4.3	4.3	4.1	3.9	3.8	3.5	3.3
7.0	6.0	4.5	4.4	4.1	4.0	3.8	3.6	3.3
9.0	7.8	4.6	4.4	4.1	4.0	3.8	3.6	3.3
12.0	10.6	4.6	4.4	4.1	4.0	3.8	3.6	3.3
15.0	13.5	4.6	4.4	4.1	4.0	3.8	3.6	3.3

TC : 总制热量 (Total Capacity) kW.



机器选型

机器选型

制热能力

型号：AUQB045

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	2.5	2.5	2.4	2.4	2.4	2.4	2.4
-15.0	-16.0	2.9	2.9	2.9	2.9	2.8	2.8	2.8
-12.0	-13.0	3.2	3.2	3.2	3.2	3.2	3.2	3.1
-9.0	-10.0	3.6	3.5	3.5	3.5	3.5	3.5	3.5
-7.0	-8.0	3.8	3.8	3.7	3.7	3.7	3.7	3.7
-5.0	-6.0	4.0	4.0	4.0	4.0	4.0	3.9	3.8
-3.0	-4.0	4.3	4.3	4.2	4.2	4.2	4.2	3.9
-1.0	-2.0	4.5	4.5	4.5	4.5	4.4	4.2	3.9
0.0	-1.0	4.7	4.6	4.6	4.6	4.6	4.2	3.9
2.0	1.0	4.9	4.9	4.8	4.7	4.6	4.3	3.9
5.0	4.0	5.3	5.3	5.0	4.8	4.6	4.3	4.0
7.0	6.0	5.5	5.3	5.0	4.8	4.7	4.3	4.0
9.0	7.8	5.7	5.3	5.0	4.8	4.7	4.3	4.0
12.0	10.6	5.7	5.3	5.0	4.8	4.7	4.3	4.0
15.0	13.5	5.7	5.3	5.0	4.8	4.7	4.3	4.0

型号：AUQB056

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	3.1	3.1	3.1	3.1	3.1	3.1	3.0
-15.0	-16.0	3.6	3.6	3.6	3.6	3.6	3.6	3.6
-12.0	-13.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
-9.0	-10.0	4.5	4.5	4.4	4.4	4.4	4.4	4.4
-7.0	-8.0	4.8	4.8	4.7	4.7	4.7	4.7	4.7
-5.0	-6.0	5.1	5.1	5.0	5.0	5.0	5.0	4.8
-3.0	-4.0	5.4	5.4	5.3	5.3	5.3	5.3	4.9
-1.0	-2.0	5.7	5.7	5.6	5.6	5.6	5.3	4.9
0.0	-1.0	5.9	5.8	5.8	5.8	5.7	5.3	4.9
2.0	1.0	6.2	6.1	6.1	6.0	5.8	5.4	5.0
5.0	4.0	6.7	6.6	6.3	6.0	5.8	5.4	5.0
7.0	6.0	7.0	6.7	6.3	6.1	5.9	5.5	5.0
9.0	7.8	7.1	6.7	6.3	6.1	5.9	5.5	5.0
12.0	10.6	7.1	6.7	6.3	6.1	5.9	5.5	5.0
15.0	13.5	7.1	6.7	6.3	6.1	5.9	5.5	5.0

型号：AUQB071

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	3.9	3.9	3.9	3.9	3.9	3.9	3.9
-15.0	-16.0	4.6	4.6	4.6	4.6	4.5	4.5	4.5
-12.0	-13.0	5.1	5.1	5.1	5.1	5.1	5.1	5.0
-9.0	-10.0	5.7	5.7	5.6	5.6	5.6	5.6	5.6
-7.0	-8.0	6.1	6.0	6.0	6.0	6.0	5.9	5.9
-5.0	-6.0	6.5	6.4	6.4	6.4	6.3	6.3	6.1
-3.0	-4.0	6.8	6.8	6.8	6.7	6.7	6.7	6.2
-1.0	-2.0	7.2	7.2	7.1	7.1	7.1	6.8	6.2
0.0	-1.0	7.4	7.4	7.3	7.3	7.3	6.8	6.2
2.0	1.0	7.8	7.8	7.7	7.6	7.3	6.8	6.3
5.0	4.0	8.5	8.4	7.9	7.7	7.4	6.9	6.3
7.0	6.0	8.9	8.5	8.0	7.7	7.5	6.9	6.4
9.0	7.8	9.1	8.5	8.0	7.7	7.5	6.9	6.4
12.0	10.6	9.1	8.5	8.0	7.7	7.5	6.9	6.4
15.0	13.5	9.1	8.5	8.0	7.7	7.5	6.9	6.4

TC：总制热量 (Total Capacity) kW.

## 2-8-2. 四出风嵌入式

■ 型号：AUQA056

制热能力

机器选型

机器选型

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	3.1	3.1	3.1	3.1	3.1	3.1	3.0
-15.0	-16.0	3.6	3.6	3.6	3.6	3.6	3.6	3.6
-12.0	-13.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
-9.0	-10.0	4.5	4.5	4.4	4.4	4.4	4.4	4.4
-7.0	-8.0	4.8	4.8	4.7	4.7	4.7	4.7	4.7
-5.0	-6.0	5.1	5.1	5.0	5.0	5.0	5.0	4.8
-3.0	-4.0	5.4	5.4	5.3	5.3	5.3	5.3	4.9
-1.0	-2.0	5.7	5.7	5.6	5.6	5.6	5.3	4.9
0.0	-1.0	5.9	5.8	5.8	5.8	5.7	5.3	4.9
2.0	1.0	6.2	6.1	6.1	6.0	5.8	5.4	5.0
5.0	4.0	6.7	6.6	6.3	6.0	5.8	5.4	5.0
7.0	6.0	7.0	6.7	6.3	6.1	5.9	5.5	5.0
9.0	7.8	7.1	6.7	6.3	6.1	5.9	5.5	5.0
12.0	10.6	7.1	6.7	6.3	6.1	5.9	5.5	5.0
15.0	13.5	7.1	6.7	6.3	6.1	5.9	5.5	5.0

■ 型号：AUQA071

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	3.9	3.9	3.9	3.9	3.9	3.9	3.9
-15.0	-16.0	4.6	4.6	4.6	4.6	4.5	4.5	4.5
-12.0	-13.0	5.1	5.1	5.1	5.1	5.1	5.1	5.0
-9.0	-10.0	5.7	5.7	5.6	5.6	5.6	5.6	5.6
-7.0	-8.0	6.1	6.0	6.0	6.0	6.0	5.9	5.9
-5.0	-6.0	6.5	6.4	6.4	6.4	6.3	6.3	6.1
-3.0	-4.0	6.8	6.8	6.8	6.7	6.7	6.7	6.2
-1.0	-2.0	7.2	7.2	7.1	7.1	7.1	6.8	6.2
0.0	-1.0	7.4	7.4	7.3	7.3	7.3	6.8	6.2
2.0	1.0	7.8	7.8	7.7	7.6	7.3	6.8	6.3
5.0	4.0	8.5	8.4	7.9	7.7	7.4	6.8	6.3
7.0	6.0	8.9	8.5	8.0	7.7	7.5	6.9	6.4
9.0	7.8	9.1	8.5	8.0	7.7	7.5	6.9	6.4
12.0	10.6	9.1	8.5	8.0	7.7	7.5	6.9	6.4
15.0	13.5	9.1	8.5	8.0	7.7	7.5	6.9	6.4

TC：总制热量 (Total Capacity) kW.



制热能力

■ 型号：AUQA090

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	4.9	4.9	4.9	4.9	4.9	4.9	4.8
-15.0	-16.0	5.8	5.7	5.7	5.7	5.7	5.7	5.7
-12.0	-13.0	6.4	6.4	6.4	6.3	6.3	6.3	6.3
-9.0	-10.0	7.1	7.1	7.0	7.0	7.0	7.0	7.0
-7.0	-8.0	7.6	7.6	7.5	7.5	7.5	7.4	7.4
-5.0	-6.0	8.1	8.0	8.0	8.0	7.9	7.9	7.7
-3.0	-4.0	8.5	8.5	8.4	8.4	8.4	8.3	7.7
-1.0	-2.0	9.0	9.0	8.9	8.9	8.9	8.4	7.8
0.0	-1.0	9.3	9.2	9.2	9.1	9.1	8.5	7.8
2.0	1.0	9.8	9.7	9.7	9.5	9.2	8.5	7.9
5.0	4.0	10.6	10.5	9.9	9.6	9.3	8.6	7.9
7.0	6.0	11.1	10.7	10.0	9.7	9.3	8.7	8.0
9.0	7.8	11.3	10.7	10.0	9.7	9.3	8.7	8.0
12.0	10.6	11.3	10.7	10.0	9.7	9.3	8.7	8.0
15.0	13.5	11.3	10.7	10.0	9.7	9.3	8.7	8.0

■ 型号：AUQA112

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	6.2	6.2	6.1	6.1	6.1	6.1	6.0
-15.0	-16.0	7.2	7.2	7.1	7.1	7.1	7.1	7.1
-12.0	-13.0	8.0	8.0	8.0	7.9	7.9	7.9	7.9
-9.0	-10.0	8.9	8.8	8.8	8.8	8.8	8.7	9.7
-7.0	-8.0	9.5	9.4	9.4	9.4	9.3	9.3	9.2
-5.0	-6.0	10.1	10.0	10.0	10.0	9.9	9.8	9.6
-3.0	-4.0	10.7	10.6	10.6	10.5	10.5	10.4	9.7
-1.0	-2.0	11.3	11.2	11.2	11.2	11.1	10.8	9.7
0.0	-1.0	11.6	11.5	11.5	11.4	11.4	10.6	9.8
2.0	1.0	12.3	12.2	12.1	11.9	11.5	10.6	9.8
5.0	4.0	13.2	13.1	12.4	12.0	11.6	10.8	9.9
7.0	6.0	13.8	13.3	12.5	12.1	11.7	10.8	10.0
9.0	7.8	14.2	13.3	12.5	12.1	11.7	10.8	10.0
12.0	10.6	14.2	13.3	12.5	12.1	11.7	10.8	10.0
15.0	13.5	14.2	13.3	12.5	12.1	11.7	10.8	10.0

■ 型号：AUQA125

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	6.9	6.9	6.8	6.8	6.8	6.8	6.8
-15.0	-16.0	8.1	8.0	8.0	8.0	8.0	8.0	7.9
-12.0	-13.0	9.0	9.0	8.9	8.9	8.9	8.8	8.8
-9.0	-10.0	10.0	9.9	9.9	9.8	9.8	9.8	9.7
-7.0	-8.0	10.6	10.6	10.5	10.5	10.4	10.4	10.4
-5.0	-6.0	11.3	11.2	11.2	11.2	11.1	11.0	10.8
-3.0	-4.0	12.0	11.9	11.8	11.8	11.8	11.7	10.8
-1.0	-2.0	12.7	12.6	12.5	12.5	12.4	11.8	10.9
0.0	-1.0	13.0	12.9	12.8	12.8	12.8	11.9	10.9
2.0	1.0	13.7	13.6	13.6	13.3	12.8	11.9	11.0
5.0	4.0	14.8	14.7	13.9	13.4	13.0	12.0	11.1
7.0	6.0	15.5	14.9	14.0	13.5	13.1	12.1	11.2
9.0	7.8	15.9	14.9	14.0	13.5	13.1	12.1	11.2
12.0	10.6	15.9	14.9	14.0	13.5	13.1	12.1	11.2
15.0	13.5	15.9	14.9	14.0	13.5	13.1	12.1	11.2

■ 型号：AUQA140

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	7.9	7.9	7.8	7.8	7.8	7.8	7.7
-15.0	-16.0	9.2	9.2	9.1	9.1	9.1	9.1	9.0
-12.0	-13.0	10.3	10.3	10.2	10.2	10.2	10.1	10.1
-9.0	-10.0	11.4	11.3	11.3	11.2	11.2	11.2	11.1
-7.0	-8.0	12.1	12.1	12.0	12.0	11.9	11.9	11.8
-5.0	-6.0	12.9	12.9	12.7	12.7	12.7	12.6	12.3
-3.0	-4.0	13.7	13.6	13.5	13.5	13.5	13.4	12.4
-1.0	-2.0	14.5	14.4	14.3	14.3	14.2	13.5	12.4
0.0	-1.0	14.9	14.8	14.7	14.6	14.6	13.6	12.5
2.0	1.0	15.7	15.6	15.5	15.2	14.7	13.6	12.6
5.0	4.0	16.9	16.8	15.9	15.3	14.8	13.8	12.7
7.0	6.0	17.7	17.1	16.0	15.4	14.9	13.9	12.8
9.0	7.8	18.1	17.1	16.0	15.4	14.9	13.9	12.8
12.0	10.6	18.1	17.1	16.0	15.4	14.9	13.9	12.8
15.0	13.5	18.1	17.1	16.0	15.4	14.9	13.9	12.8

TC : 总制热量 (Total Capacity) kW.

## 2-8-3. 小型风管式

### ■ 型号：ARQB022

制热能力

机器选型

机器选型

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4
-15.0	-16.0	1.6	1.6	1.6	1.6	1.6	1.6	1.6
-12.0	-13.0	1.8	1.8	1.8	1.8	1.8	1.8	1.8
-9.0	-10.0	2.0	2.0	2.0	2.0	2.0	2.0	1.9
-7.0	-8.0	2.1	2.1	2.1	2.1	2.1	2.1	2.1
-5.0	-6.0	2.3	2.2	2.2	2.2	2.2	2.2	2.2
-3.0	-4.0	2.4	2.4	2.4	2.4	2.4	2.3	2.2
-1.0	-2.0	2.5	2.5	2.5	2.5	2.5	2.4	2.2
0.0	-1.0	2.6	2.6	2.6	2.6	2.6	2.4	2.2
2.0	1.0	2.7	2.7	2.7	2.7	2.6	2.4	2.2
5.0	4.0	3.0	2.9	2.8	2.7	2.6	2.4	2.2
7.0	6.0	3.1	3.0	2.8	2.7	2.6	2.4	2.2
9.0	7.8	3.2	3.0	2.8	2.7	2.6	2.4	2.2
12.0	10.6	3.2	3.0	2.8	2.7	2.6	2.4	2.2
15.0	13.5	3.2	3.0	2.8	2.7	2.6	2.4	2.2

### ■ 型号：ARQB028

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	1.6	1.6	1.6	1.6	1.6	1.6	1.5
-15.0	-16.0	1.8	1.8	1.8	1.8	1.8	1.8	1.8
-12.0	-13.0	2.1	2.1	2.0	2.0	2.0	2.0	2.0
-9.0	-10.0	2.3	2.3	2.3	2.2	2.2	2.2	2.2
-7.0	-8.0	2.4	2.4	2.4	2.4	2.4	2.4	2.4
-5.0	-6.0	2.6	2.6	2.5	2.5	2.5	2.5	2.5
-3.0	-4.0	2.7	2.7	2.7	2.7	2.7	2.7	2.5
-1.0	-2.0	2.9	2.9	2.9	2.9	2.8	2.7	2.5
0.0	-1.0	3.0	3.0	2.9	2.9	2.9	2.7	2.5
2.0	1.0	3.1	3.1	3.1	3.0	2.9	2.7	2.5
5.0	4.0	3.4	3.4	3.2	3.1	3.0	2.8	2.5
7.0	6.0	3.5	3.4	3.2	3.1	3.0	2.8	2.6
9.0	7.8	3.6	3.4	3.2	3.1	3.0	2.8	2.6
12.0	10.6	3.6	3.4	3.2	3.1	3.0	2.8	2.6
15.0	13.5	3.6	3.4	3.2	3.1	3.0	2.8	2.6

TC：总制热量 (Total Capacity) kW.



机器选型

机器选型

制热能力

型号：ARQB036

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
-15.0	-16.0	2.4	2.4	2.3	2.3	2.3	2.3	2.3
-12.0	-13.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6
-9.0	-10.0	2.9	2.9	2.9	2.9	2.9	2.9	2.9
-7.0	-8.0	3.1	3.1	3.1	3.1	3.1	3.0	3.0
-5.0	-6.0	3.3	3.3	3.3	3.3	3.3	3.2	3.1
-3.0	-4.0	3.5	3.5	3.5	3.4	3.4	3.4	3.2
-1.0	-2.0	3.7	3.7	3.7	3.7	3.6	3.5	3.2
0.0	-1.0	3.8	3.8	3.8	3.7	3.7	3.5	3.2
2.0	1.0	4.0	4.0	4.0	3.9	3.8	3.5	3.2
5.0	4.0	4.3	4.3	4.1	3.9	3.8	3.5	3.3
7.0	6.0	4.5	4.4	4.1	4.0	3.8	3.6	3.3
9.0	7.8	4.6	4.4	4.1	4.0	3.8	3.6	3.3
12.0	10.6	4.6	4.4	4.1	4.0	3.8	3.6	3.3
15.0	13.5	4.6	4.4	4.1	4.0	3.8	3.6	3.3

型号：ARQB045

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	2.5	2.5	2.4	2.4	2.4	2.4	2.4
-15.0	-16.0	2.9	2.9	2.9	2.9	2.8	2.8	2.8
-12.0	-13.0	3.2	3.2	3.2	3.2	3.2	3.2	3.1
-9.0	-10.0	3.6	3.5	3.5	3.5	3.5	3.5	3.5
-7.0	-8.0	3.8	3.8	3.7	3.7	3.7	3.7	3.7
-5.0	-6.0	4.0	4.0	4.0	4.0	4.0	3.9	3.8
-3.0	-4.0	4.3	4.3	4.2	4.2	4.2	4.2	3.9
-1.0	-2.0	4.5	4.5	4.5	4.5	4.4	4.2	3.9
0.0	-1.0	4.7	4.6	4.6	4.6	4.6	4.2	3.9
2.0	1.0	4.9	4.9	4.8	4.7	4.6	4.3	3.9
5.0	4.0	5.3	5.3	5.0	4.8	4.6	4.3	4.0
7.0	6.0	5.5	5.3	5.0	4.8	4.7	4.3	4.0
9.0	7.8	5.7	5.3	5.0	4.8	4.7	4.3	4.0
12.0	10.6	5.7	5.3	5.0	4.8	4.7	4.3	4.0
15.0	13.5	5.7	5.3	5.0	4.8	4.7	4.3	4.0

型号：ARQB056

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	3.1	3.1	3.1	3.1	3.1	3.1	3.0
-15.0	-16.0	3.6	3.6	3.6	3.6	3.6	3.6	3.6
-12.0	-13.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
-9.0	-10.0	4.5	4.5	4.4	4.4	4.4	4.4	4.4
-7.0	-8.0	4.8	4.8	4.7	4.7	4.7	4.7	4.7
-5.0	-6.0	5.1	5.1	5.0	5.0	5.0	5.0	4.8
-3.0	-4.0	5.4	5.4	5.3	5.3	5.3	5.3	4.9
-1.0	-2.0	5.7	5.7	5.6	5.6	5.6	5.3	4.9
0.0	-1.0	5.9	5.8	5.8	5.8	5.7	5.3	4.9
2.0	1.0	6.2	6.1	6.1	6.0	5.8	5.4	5.0
5.0	4.0	6.7	6.6	6.3	6.0	5.8	5.4	5.0
7.0	6.0	7.0	6.7	6.3	6.1	5.9	5.5	5.0
9.0	7.8	7.1	6.7	6.3	6.1	5.9	5.5	5.0
12.0	10.6	7.1	6.7	6.3	6.1	5.9	5.5	5.0
15.0	13.5	7.1	6.7	6.3	6.1	5.9	5.5	5.0

TC : 总制热量 (Total Capacity) kW.

## 2-8-4. 低静压风管式

### ■ 型号：ARQB071

制热能力

机器选型

机器选型

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	3.9	3.9	3.9	3.9	3.9	3.9	3.9
-15.0	-16.0	4.6	4.6	4.6	4.6	4.5	4.5	4.5
-12.0	-13.0	5.1	5.1	5.1	5.1	5.1	5.1	5.0
-9.0	-10.0	5.7	5.7	5.6	5.6	5.6	5.6	5.6
-7.0	-8.0	6.1	6.0	6.0	6.0	6.0	5.9	5.9
-5.0	-6.0	6.5	6.4	6.4	6.4	6.3	6.3	6.1
-3.0	-4.0	6.8	6.8	6.8	6.7	6.7	6.7	6.2
-1.0	-2.0	7.2	7.2	7.1	7.1	7.1	6.8	6.2
0.0	-1.0	7.4	7.4	7.3	7.3	7.3	6.8	6.2
2.0	1.0	7.8	7.8	7.7	7.6	7.3	6.8	6.3
5.0	4.0	8.5	8.4	7.9	7.7	7.4	6.9	6.3
7.0	6.0	8.9	8.5	8.0	7.7	7.5	6.9	6.4
9.0	7.8	9.1	8.5	8.0	7.7	7.5	6.9	6.4
12.0	10.6	9.1	8.5	8.0	7.7	7.5	6.9	6.4
15.0	13.5	9.1	8.5	8.0	7.7	7.5	6.9	6.4

### ■ 型号：ARQB090

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	4.9	4.9	4.9	4.9	4.9	4.9	4.8
-15.0	-16.0	5.8	5.7	5.7	5.7	5.7	5.7	5.7
-12.0	-13.0	6.4	6.4	6.4	6.3	6.3	6.3	6.3
-9.0	-10.0	7.1	7.1	7.0	7.0	7.0	7.0	7.0
-7.0	-8.0	7.6	7.6	7.5	7.5	7.5	7.4	7.4
-5.0	-6.0	8.1	8.0	8.0	8.0	7.9	7.9	7.7
-3.0	-4.0	8.5	8.5	8.4	8.4	8.4	8.3	8.1
-1.0	-2.0	9.0	9.0	8.9	8.9	8.9	8.8	7.8
0.0	-1.0	9.3	9.2	9.2	9.1	9.1	8.5	7.8
2.0	1.0	9.8	9.7	9.7	9.5	9.2	8.5	7.9
5.0	4.0	10.6	10.5	9.9	9.6	9.3	8.6	7.9
7.0	6.0	11.1	10.7	10.0	9.7	9.3	8.7	8.0
9.0	7.8	11.3	10.7	10.0	9.7	9.3	8.7	8.0
12.0	10.6	11.3	10.7	10.0	9.7	9.3	8.7	8.0
15.0	13.5	11.3	10.7	10.0	9.7	9.3	8.7	8.0

### ■ 型号：ARQB112

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	6.2	6.2	6.1	6.1	6.1	6.1	6.0
-15.0	-16.0	7.2	7.2	7.1	7.1	7.1	7.1	7.1
-12.0	-13.0	8.0	8.0	8.0	7.9	7.9	7.9	7.9
-9.0	-10.0	8.9	8.8	8.8	8.8	8.8	8.7	8.7
-7.0	-8.0	9.5	9.4	9.4	9.4	9.3	9.3	9.2
-5.0	-6.0	10.1	10.0	10.0	10.0	9.9	9.8	9.6
-3.0	-4.0	10.7	10.6	10.6	10.5	10.5	10.4	9.7
-1.0	-2.0	11.3	11.2	11.2	11.2	11.1	10.6	9.7
0.0	-1.0	11.6	11.5	11.5	11.4	11.4	10.6	9.8
2.0	1.0	12.3	12.2	12.1	11.9	11.5	10.6	9.8
5.0	4.0	13.2	13.1	12.4	12.0	11.6	10.8	9.9
7.0	6.0	13.8	13.3	12.5	12.1	11.7	10.8	10.0
9.0	7.8	14.2	13.3	12.5	12.1	11.7	10.8	10.0
12.0	10.6	14.2	13.3	12.5	12.1	11.7	10.8	10.0
15.0	13.5	14.2	13.3	12.5	12.1	11.7	10.8	10.0

### ■ 型号：ARQB125

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	6.9	6.9	6.8	6.8	6.8	6.8	6.8
-15.0	-16.0	8.1	8.0	8.0	8.0	8.0	8.0	7.9
-12.0	-13.0	9.0	9.0	8.9	8.9	8.9	8.8	8.8
-9.0	-10.0	10.0	9.9	9.9	9.8	9.8	9.8	9.7
-7.0	-8.0	10.6	10.6	10.5	10.5	10.4	10.4	10.4
-5.0	-6.0	11.3	11.2	11.2	11.2	11.1	11.0	10.8
-3.0	-4.0	12.0	11.9	11.8	11.8	11.8	11.7	10.8
-1.0	-2.0	12.7	12.6	12.5	12.5	12.4	11.8	10.9
0.0	-1.0	13.0	12.9	12.8	12.8	12.8	11.9	10.9
2.0	1.0	13.7	13.6	13.6	13.3	12.8	11.9	11.0
5.0	4.0	14.8	14.7	13.9	13.4	13.0	12.0	11.1
7.0	6.0	15.5	14.9	14.0	13.5	13.1	12.1	11.2
9.0	7.8	15.9	14.9	14.0	13.5	13.1	12.1	11.2
12.0	10.6	15.9	14.9	14.0	13.5	13.1	12.1	11.2
15.0	13.5	15.9	14.9	14.0	13.5	13.1	12.1	11.2

TC：总制热量 (Total Capacity) kW.

## 2-8-5. 中静压风管式

### ■ 型号：ARQA071

制热能力

机器选型

机器选型

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	3.9	3.9	3.9	3.9	3.9	3.9	3.9
-15.0	-16.0	4.6	4.6	4.6	4.6	4.5	4.5	4.5
-12.0	-13.0	5.1	5.1	5.1	5.1	5.1	5.1	5.0
-9.0	-10.0	5.7	5.7	5.6	5.6	5.6	5.6	5.6
-7.0	-8.0	6.1	6.0	6.0	6.0	6.0	5.9	5.9
-5.0	-6.0	6.5	6.4	6.4	6.4	6.3	6.3	6.1
-3.0	-4.0	6.8	6.8	6.8	6.7	6.7	6.7	6.2
-1.0	-2.0	7.2	7.2	7.1	7.1	7.1	6.8	6.2
0.0	-1.0	7.4	7.4	7.3	7.3	7.3	6.8	6.2
2.0	1.0	7.8	7.8	7.7	7.6	7.3	6.8	6.3
5.0	4.0	8.5	8.4	7.9	7.7	7.4	6.9	6.3
7.0	6.0	8.9	8.5	8.0	7.7	7.5	6.9	6.4
9.0	7.8	9.1	8.5	8.0	7.7	7.5	6.9	6.4
12.0	10.6	9.1	8.5	8.0	7.7	7.5	6.9	6.4
15.0	13.5	9.1	8.5	8.0	7.7	7.5	6.9	6.4

### ■ 型号：ARQA090

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	4.9	4.9	4.9	4.9	4.9	4.9	4.8
-15.0	-16.0	5.8	5.7	5.7	5.7	5.7	5.7	5.7
-12.0	-13.0	6.4	6.4	6.4	6.3	6.3	6.3	6.3
-9.0	-10.0	7.1	7.1	7.0	7.0	7.0	7.0	7.0
-7.0	-8.0	7.6	7.6	7.5	7.5	7.5	7.4	7.4
-5.0	-6.0	8.1	8.0	8.0	8.0	7.9	7.9	7.7
-3.0	-4.0	8.5	8.5	8.4	8.4	8.4	8.3	8.1
-1.0	-2.0	9.0	9.0	8.9	8.9	8.9	8.8	7.8
0.0	-1.0	9.3	9.2	9.2	9.1	9.1	8.5	7.8
2.0	1.0	9.8	9.7	9.7	9.5	9.2	8.5	7.9
5.0	4.0	10.6	10.5	9.9	9.6	9.3	8.6	7.9
7.0	6.0	11.1	10.7	10.0	9.7	9.3	8.7	8.0
9.0	7.8	11.3	10.7	10.0	9.7	9.3	8.7	8.0
12.0	10.6	11.3	10.7	10.0	9.7	9.3	8.7	8.0
15.0	13.5	11.3	10.7	10.0	9.7	9.3	8.7	8.0

### ■ 型号：ARQA112

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	6.2	6.2	6.1	6.1	6.1	6.1	6.0
-15.0	-16.0	7.2	7.2	7.1	7.1	7.1	7.1	7.1
-12.0	-13.0	8.0	8.0	8.0	7.9	7.9	7.9	7.9
-9.0	-10.0	8.9	8.8	8.8	8.8	8.8	8.7	8.7
-7.0	-8.0	9.5	9.4	9.4	9.4	9.3	9.3	9.2
-5.0	-6.0	10.1	10.0	10.0	10.0	9.9	9.8	9.6
-3.0	-4.0	10.7	10.6	10.6	10.5	10.5	10.4	9.7
-1.0	-2.0	11.3	11.2	11.2	11.2	11.1	10.6	9.7
0.0	-1.0	11.6	11.5	11.5	11.4	11.4	10.6	9.8
2.0	1.0	12.3	12.2	12.1	11.9	11.5	10.6	9.8
5.0	4.0	13.2	13.1	12.4	12.0	11.6	10.8	9.9
7.0	6.0	13.8	13.3	12.5	12.1	11.7	10.8	10.0
9.0	7.8	14.2	13.3	12.5	12.1	11.7	10.8	10.0
12.0	10.6	14.2	13.3	12.5	12.1	11.7	10.8	10.0
15.0	13.5	14.2	13.3	12.5	12.1	11.7	10.8	10.0

### ■ 型号：ARQA125

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	6.9	6.9	6.8	6.8	6.8	6.8	6.8
-15.0	-16.0	8.1	8.0	8.0	8.0	8.0	8.0	7.9
-12.0	-13.0	9.0	9.0	8.9	8.9	8.9	8.8	8.8
-9.0	-10.0	10.0	9.9	9.9	9.8	9.8	9.8	9.7
-7.0	-8.0	10.6	10.6	10.5	10.5	10.4	10.4	10.4
-5.0	-6.0	11.3	11.2	11.2	11.2	11.1	11.0	10.8
-3.0	-4.0	12.0	11.9	11.8	11.8	11.8	11.7	10.8
-1.0	-2.0	12.7	12.6	12.5	12.5	12.4	11.8	10.9
0.0	-1.0	13.0	12.9	12.8	12.8	12.8	11.9	10.9
2.0	1.0	13.7	13.6	13.6	13.3	12.8	11.9	11.0
5.0	4.0	14.8	14.7	13.9	13.4	13.0	12.0	11.1
7.0	6.0	15.5	14.9	14.0	13.5	13.1	12.1	11.2
9.0	7.8	15.9	14.9	14.0	13.5	13.1	12.1	11.2
12.0	10.6	15.9	14.9	14.0	13.5	13.1	12.1	11.2
15.0	13.5	15.9	14.9	14.0	13.5	13.1	12.1	11.2

TC：总制热量 (Total Capacity) kW.



## 2-8-6. 高静压风管式

### ■ 型号：ARQC112

制热能力

机器选型

机器选型

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	6.2	6.2	6.1	6.1	6.1	6.1	6.0
-15.0	-16.0	7.2	7.2	7.1	7.1	7.1	7.1	7.1
-12.0	-13.0	8.0	8.0	8.0	7.9	7.9	7.9	7.9
-9.0	-10.0	8.9	8.8	8.8	8.8	8.8	8.7	8.7
-7.0	-8.0	9.5	9.4	9.4	9.4	9.3	9.3	9.2
-5.0	-6.0	10.1	10.0	10.0	10.0	9.9	9.8	9.6
-3.0	-4.0	10.7	10.6	10.6	10.5	10.5	10.4	9.7
-1.0	-2.0	11.3	11.2	11.2	11.2	11.1	10.6	9.7
0.0	-1.0	11.6	11.5	11.5	11.4	11.4	10.6	9.8
2.0	1.0	12.3	12.2	12.1	11.9	11.5	10.6	9.8
5.0	4.0	13.2	13.1	12.4	12.0	11.6	10.8	9.9
7.0	6.0	13.8	13.3	12.5	12.1	11.7	10.8	10.0
9.0	7.8	14.2	13.3	12.5	12.1	11.7	10.8	10.0
12.0	10.6	14.2	13.3	12.5	12.1	11.7	10.8	10.0
15.0	13.5	14.2	13.3	12.5	12.1	11.7	10.8	10.0

### ■ 型号：ARQC125

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	6.9	6.9	6.8	6.8	6.8	6.8	6.8
-15.0	-16.0	8.1	8.0	8.0	8.0	8.0	8.0	7.9
-12.0	-13.0	9.0	9.0	8.9	8.9	8.9	8.8	8.8
-9.0	-10.0	10.0	9.9	9.9	9.8	9.8	9.8	9.7
-7.0	-8.0	10.6	10.6	10.5	10.5	10.4	10.4	10.4
-5.0	-6.0	11.3	11.2	11.2	11.2	11.1	11.0	10.8
-3.0	-4.0	12.0	11.9	11.8	11.8	11.8	11.7	10.8
-1.0	-2.0	12.7	12.6	12.5	12.5	12.4	11.8	10.9
0.0	-1.0	13.0	12.9	12.8	12.8	12.8	11.9	10.9
2.0	1.0	13.7	13.6	13.6	13.3	12.8	11.9	11.0
5.0	4.0	14.8	14.7	13.9	13.4	13.0	12.0	11.1
7.0	6.0	15.5	14.9	14.0	13.5	13.1	12.1	11.2
9.0	7.8	15.9	14.9	14.0	13.5	13.1	12.1	11.2
12.0	10.6	15.9	14.9	14.0	13.5	13.1	12.1	11.2
15.0	13.5	15.9	14.9	14.0	13.5	13.1	12.1	11.2

### ■ 型号：ARQC180

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	9.8	9.8	9.8	9.8	9.7	9.7	9.7
-15.0	-16.0	11.6	11.5	11.4	11.4	11.4	11.4	11.3
-12.0	-13.0	12.8	12.8	12.8	12.7	12.7	12.6	12.6
-9.0	-10.0	14.2	14.2	14.1	14.0	14.0	14.0	13.9
-7.0	-8.0	15.2	15.1	15.0	15.0	14.9	14.9	14.8
-5.0	-6.0	16.1	16.1	15.9	15.9	15.9	15.7	15.4
-3.0	-4.0	17.1	17.0	16.9	16.8	16.8	16.7	15.5
-1.0	-2.0	18.1	18.0	17.8	17.8	17.8	16.9	15.6
0.0	-1.0	18.6	18.5	18.3	18.3	18.2	17.0	15.6
2.0	1.0	19.6	19.5	19.4	19.0	18.3	17.0	15.7
5.0	4.0	21.1	21.0	19.9	19.2	18.5	17.2	15.9
7.0	6.0	22.2	21.3	20.0	19.3	18.7	17.3	16.0
9.0	7.8	22.7	21.3	20.0	19.3	18.7	17.3	16.0
12.0	10.6	22.7	21.3	20.0	19.3	18.7	17.3	16.0
15.0	13.5	22.7	21.3	20.0	19.3	18.7	17.3	16.0

TC：总制热量 (Total Capacity) kW.



机器选型

机器选型

### 制热能力

#### ■ 型号：ARQC224

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	12.3	12.3	12.2	12.2	12.1	12.1	12.1
-15.0	-16.0	14.4	14.4	14.3	14.3	14.2	14.2	14.1
-12.0	-13.0	16.0	16.0	16.0	15.9	15.9	15.8	15.7
-9.0	-10.0	17.8	17.7	17.6	17.5	17.5	17.5	17.4
-7.0	-8.0	19.0	18.9	18.7	18.7	18.7	18.6	18.5
-5.0	-6.0	20.2	20.1	19.9	19.9	19.8	19.7	19.2
-3.0	-4.0	21.3	21.3	21.1	21.0	21.0	20.9	19.4
-1.0	-2.0	22.6	22.5	22.3	22.3	22.2	21.1	19.4
0.0	-1.0	23.3	23.1	22.9	22.9	22.8	21.2	19.5
2.0	1.0	24.5	24.4	24.2	23.7	22.9	21.3	19.7
5.0	4.0	26.4	26.3	24.8	24.0	23.2	21.5	19.8
7.0	6.0	27.7	26.7	25.0	24.1	23.3	21.7	20.0
9.0	7.8	28.3	26.7	25.0	24.1	23.3	21.7	20.0
12.0	10.6	28.3	26.7	25.0	24.1	23.3	21.7	20.0
15.0	13.5	28.3	26.7	25.0	24.1	23.3	21.7	20.0

#### ■ 型号：ARQC250

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	13.8	13.8	13.7	13.7	13.6	13.6	13.5
-15.0	-16.0	16.2	16.1	16.0	16.0	15.9	15.9	15.8
-12.0	-13.0	18.0	18.0	17.9	17.8	17.8	17.7	17.6
-9.0	-10.0	19.9	19.8	19.7	19.6	19.6	19.6	19.5
-7.0	-8.0	21.2	21.2	21.0	21.0	20.9	20.8	20.7
-5.0	-6.0	22.6	22.5	22.3	22.3	22.2	22.0	21.5
-3.0	-4.0	23.9	23.8	23.6	23.6	23.6	23.4	21.7
-1.0	-2.0	25.3	25.2	25.0	25.0	24.9	23.8	21.8
0.0	-1.0	26.0	25.9	25.7	25.6	25.5	23.7	21.9
2.0	1.0	27.5	27.3	27.1	26.6	25.7	23.8	22.0
5.0	4.0	29.6	29.4	27.8	26.8	26.0	24.1	22.2
7.0	6.0	31.0	29.9	28.0	27.0	26.1	24.3	22.4
9.0	7.8	31.7	29.9	28.0	27.0	26.1	24.3	22.4
12.0	10.6	31.7	29.9	28.0	27.0	26.1	24.3	22.4
15.0	13.5	31.7	29.9	28.0	27.0	26.1	24.3	22.4

获取更多资料 微信搜索 蓝星全球

TC : 总制热量 (Total Capacity) kW.

## 2-8-7. 吊顶 / 落地两用式

### 制热能力

#### ■ 型号 : ABQA036

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
-15.0	-16.0	2.4	2.4	2.3	2.3	2.3	2.3	2.3
-12.0	-13.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6
-9.0	-10.0	2.9	2.9	2.9	2.9	2.9	2.9	2.9
-7.0	-8.0	3.1	3.1	3.1	3.1	3.1	3.0	3.0
-5.0	-6.0	3.3	3.3	3.3	3.3	3.3	3.2	3.1
-3.0	-4.0	3.5	3.5	3.5	3.4	3.4	3.4	3.2
-1.0	-2.0	3.7	3.7	3.7	3.7	3.6	3.5	3.2
0.0	-1.0	3.8	3.8	3.8	3.7	3.7	3.5	3.2
2.0	1.0	4.0	4.0	4.0	3.9	3.8	3.5	3.2
5.0	4.0	4.3	4.3	4.1	3.9	3.8	3.5	3.3
7.0	6.0	4.5	4.4	4.1	4.0	3.8	3.6	3.3
9.0	7.8	4.6	4.4	4.1	4.0	3.8	3.6	3.3
12.0	10.6	4.6	4.4	4.1	4.0	3.8	3.6	3.3
15.0	13.5	4.6	4.4	4.1	4.0	3.8	3.6	3.3

#### ■ 型号 : ABQA040

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	2.2	2.2	2.2	2.2	2.2	2.2	2.2
-15.0	-16.0	2.6	2.6	2.6	2.6	2.6	2.6	2.5
-12.0	-13.0	2.9	2.9	2.9	2.9	2.9	2.8	2.8
-9.0	-10.0	3.2	3.2	3.2	3.2	3.2	3.1	3.1
-7.0	-8.0	3.4	3.4	3.4	3.4	3.4	3.3	3.3
-5.0	-6.0	3.6	3.6	3.6	3.6	3.6	3.5	3.5
-3.0	-4.0	3.8	3.8	3.8	3.8	3.8	3.8	3.5
-1.0	-2.0	4.1	4.0	4.0	4.0	4.0	3.8	3.5
0.0	-1.0	4.2	4.2	4.1	4.1	4.1	3.8	3.5
2.0	1.0	4.4	4.4	4.4	4.3	4.1	3.8	3.5
5.0	4.0	4.8	4.7	4.5	4.3	4.2	3.8	3.6
7.0	6.0	5.0	4.8	4.5	4.3	4.2	3.9	3.6
9.0	7.8	5.1	4.8	4.5	4.3	4.2	3.9	3.6
12.0	10.6	5.1	4.8	4.5	4.3	4.2	3.9	3.6
15.0	13.5	5.1	4.8	4.5	4.3	4.2	3.9	3.6

#### ■ 型号 : ABQA056

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	3.1	3.1	3.1	3.1	3.1	3.1	3.0
-15.0	-16.0	3.6	3.6	3.6	3.6	3.6	3.6	3.6
-12.0	-13.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
-9.0	-10.0	4.5	4.5	4.4	4.4	4.4	4.4	4.4
-7.0	-8.0	4.8	4.8	4.7	4.7	4.7	4.7	4.7
-5.0	-6.0	5.1	5.1	5.0	5.0	5.0	5.0	4.8
-3.0	-4.0	5.4	5.4	5.3	5.3	5.3	5.3	4.9
-1.0	-2.0	5.7	5.7	5.6	5.6	5.6	5.3	4.9
0.0	-1.0	5.9	5.8	5.8	5.8	5.7	5.3	4.9
2.0	1.0	6.2	6.1	6.1	6.0	5.8	5.4	5.0
5.0	4.0	6.7	6.6	6.3	6.0	5.8	5.4	5.0
7.0	6.0	7.0	6.7	6.3	6.1	5.9	5.5	5.0
9.0	7.8	7.1	6.7	6.3	6.1	5.9	5.5	5.0
12.0	10.6	7.1	6.7	6.3	6.1	5.9	5.5	5.0
15.0	13.5	7.1	6.7	6.3	6.1	5.9	5.5	5.0

#### ■ 型号 : ABQA071

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	3.9	3.9	3.9	3.9	3.9	3.9	3.9
-15.0	-16.0	4.6	4.6	4.6	4.6	4.5	4.5	4.5
-12.0	-13.0	5.1	5.1	5.1	5.1	5.1	5.1	5.0
-9.0	-10.0	5.7	5.7	5.6	5.6	5.6	5.6	5.6
-7.0	-8.0	6.1	6.0	6.0	6.0	6.0	5.9	5.9
-5.0	-6.0	6.5	6.4	6.4	6.4	6.3	6.3	6.1
-3.0	-4.0	6.8	6.8	6.8	6.7	6.7	6.7	6.2
-1.0	-2.0	7.2	7.2	7.1	7.1	7.1	6.8	6.2
0.0	-1.0	7.4	7.4	7.3	7.3	7.3	6.8	6.2
2.0	1.0	7.8	7.8	7.7	7.6	7.3	6.8	6.3
5.0	4.0	8.5	8.4	7.9	7.7	7.4	6.9	6.3
7.0	6.0	8.9	8.5	8.0	7.7	7.5	6.9	6.4
9.0	7.8	9.1	8.5	8.0	7.7	7.5	6.9	6.4
12.0	10.6	9.1	8.5	8.0	7.7	7.5	6.9	6.4
15.0	13.5	9.1	8.5	8.0	7.7	7.5	6.9	6.4

TC : 总制热量 (Total Capacity) kW.

## 2-8-8. 吊顶式

### ■ 型号：ABQA090

制热能力

机器选型

机器选型

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	4.9	4.9	4.9	4.9	4.9	4.9	4.8
-15.0	-16.0	5.8	5.7	5.7	5.7	5.7	5.7	5.7
-12.0	-13.0	6.4	6.4	6.4	6.3	6.3	6.3	6.3
-9.0	-10.0	7.1	7.1	7.0	7.0	7.0	7.0	7.0
-7.0	-8.0	7.6	7.6	7.5	7.5	7.5	7.4	7.4
-5.0	-6.0	8.1	8.0	8.0	8.0	7.9	7.9	7.7
-3.0	-4.0	8.5	8.5	8.4	8.4	8.4	8.3	7.7
-1.0	-2.0	9.0	9.0	8.9	8.9	8.9	8.4	7.8
0.0	-1.0	9.3	9.2	9.2	9.1	9.1	8.5	7.8
2.0	1.0	9.8	9.7	9.7	9.5	9.2	8.5	7.9
5.0	4.0	10.6	10.5	9.9	9.6	9.3	8.6	7.9
7.0	6.0	11.1	10.7	10.0	9.7	9.3	8.7	8.0
9.0	7.8	11.3	10.7	10.0	9.7	9.3	8.7	8.0
12.0	10.6	11.3	10.7	10.0	9.7	9.3	8.7	8.0
15.0	13.5	11.3	10.7	10.0	9.7	9.3	8.7	8.0

### ■ 型号：ABQA112

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	6.2	6.2	6.1	6.1	6.1	6.1	6.0
-15.0	-16.0	7.2	7.2	7.1	7.1	7.1	7.1	7.1
-12.0	-13.0	8.0	8.0	8.0	7.9	7.9	7.9	7.9
-9.0	-10.0	8.9	8.8	8.8	8.8	8.8	8.7	9.7
-7.0	-8.0	9.5	9.4	9.4	9.4	9.3	9.3	9.2
-5.0	-6.0	10.1	10.0	10.0	10.0	9.9	9.8	9.6
-3.0	-4.0	10.7	10.6	10.6	10.5	10.5	10.4	9.7
-1.0	-2.0	11.3	11.2	11.2	11.2	11.1	10.8	9.7
0.0	-1.0	11.6	11.5	11.5	11.4	11.4	10.6	9.8
2.0	1.0	12.3	12.2	12.1	11.9	11.5	10.6	9.8
5.0	4.0	13.2	13.1	12.4	12.0	11.6	10.8	9.9
7.0	6.0	13.8	13.3	12.5	12.1	11.7	10.8	10.0
9.0	7.8	14.2	13.3	12.5	12.1	11.7	10.8	10.0
12.0	10.6	14.2	13.3	12.5	12.1	11.7	10.8	10.0
15.0	13.5	14.2	13.3	12.5	12.1	11.7	10.8	10.0

### ■ 型号：ABQA125

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	6.9	6.9	6.8	6.8	6.8	6.8	6.8
-15.0	-16.0	8.1	8.0	8.0	8.0	8.0	8.0	7.9
-12.0	-13.0	9.0	9.0	8.9	8.9	8.9	8.8	8.8
-9.0	-10.0	10.0	9.9	9.9	9.8	9.8	9.8	9.7
-7.0	-8.0	10.6	10.6	10.5	10.5	10.4	10.4	10.4
-5.0	-6.0	11.3	11.2	11.2	11.2	11.1	11.0	10.8
-3.0	-4.0	12.0	11.9	11.8	11.8	11.8	11.7	10.8
-1.0	-2.0	12.7	12.6	12.5	12.5	12.4	11.8	10.9
0.0	-1.0	13.0	12.9	12.8	12.8	12.8	11.9	10.9
2.0	1.0	13.7	13.6	13.6	13.3	12.8	11.9	11.0
5.0	4.0	14.8	14.7	13.9	13.4	13.0	12.0	11.1
7.0	6.0	15.5	14.9	14.0	13.5	13.1	12.1	11.2
9.0	7.8	15.9	14.9	14.0	13.5	13.1	12.1	11.2
12.0	10.6	15.9	14.9	14.0	13.5	13.1	12.1	11.2
15.0	13.5	15.9	14.9	14.0	13.5	13.1	12.1	11.2

### ■ 型号：ABQA140

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	7.9	7.9	7.8	7.8	7.8	7.8	7.7
-15.0	-16.0	9.2	9.2	9.1	9.1	9.1	9.1	9.0
-12.0	-13.0	10.3	10.3	10.2	10.2	10.2	10.1	10.1
-9.0	-10.0	11.4	11.3	11.3	11.2	11.2	11.2	11.1
-7.0	-8.0	12.1	12.1	12.0	12.0	11.9	11.9	11.8
-5.0	-6.0	12.9	12.9	12.7	12.7	12.7	12.6	12.3
-3.0	-4.0	13.7	13.6	13.5	13.5	13.5	13.4	12.4
-1.0	-2.0	14.5	14.4	14.3	14.3	14.2	13.5	12.4
0.0	-1.0	14.9	14.8	14.7	14.6	14.6	13.6	12.5
2.0	1.0	15.7	15.6	15.5	15.2	14.7	13.6	12.6
5.0	4.0	16.9	16.8	15.9	15.3	14.8	13.8	12.7
7.0	6.0	17.7	17.1	16.0	15.4	14.9	13.9	12.8
9.0	7.8	18.1	17.1	16.0	15.4	14.9	13.9	12.8
12.0	10.6	18.1	17.1	16.0	15.4	14.9	13.9	12.8
15.0	13.5	18.1	17.1	16.0	15.4	14.9	13.9	12.8

TC：总制热量 (Total Capacity) kW.

## 2-8-9. 小型挂壁式 (EV 组件内置)

制热能力

### ■ 型号 : ASQA022

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4
-15.0	-16.0	1.6	1.6	1.6	1.6	1.6	1.6	1.6
-12.0	-13.0	1.8	1.8	1.8	1.8	1.8	1.8	1.8
-9.0	-10.0	2.0	2.0	2.0	2.0	2.0	2.0	1.9
-7.0	-8.0	2.1	2.1	2.1	2.1	2.1	2.1	2.1
-5.0	-6.0	2.3	2.2	2.2	2.2	2.2	2.2	2.2
-3.0	-4.0	2.4	2.4	2.4	2.4	2.4	2.3	2.2
-1.0	-2.0	2.5	2.5	2.5	2.5	2.5	2.4	2.2
0.0	-1.0	2.6	2.6	2.6	2.6	2.6	2.4	2.2
2.0	1.0	2.7	2.7	2.7	2.7	2.6	2.4	2.2
5.0	4.0	3.0	2.9	2.8	2.7	2.6	2.4	2.2
7.0	6.0	3.1	3.0	2.8	2.7	2.6	2.4	2.2
9.0	7.8	3.2	3.0	2.8	2.7	2.6	2.4	2.2
12.0	10.6	3.2	3.0	2.8	2.7	2.6	2.4	2.2
15.0	13.5	3.2	3.0	2.8	2.7	2.6	2.4	2.2

### ■ 型号 : ASQA028

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	1.6	1.6	1.6	1.6	1.6	1.6	1.5
-15.0	-16.0	1.8	1.8	1.8	1.8	1.8	1.8	1.8
-12.0	-13.0	2.1	2.1	2.0	2.0	2.0	2.0	2.0
-9.0	-10.0	2.3	2.3	2.3	2.2	2.2	2.2	2.2
-7.0	-8.0	2.4	2.4	2.4	2.4	2.4	2.4	2.4
-5.0	-6.0	2.6	2.6	2.5	2.5	2.5	2.5	2.5
-3.0	-4.0	2.7	2.7	2.7	2.7	2.7	2.7	2.5
-1.0	-2.0	2.9	2.9	2.9	2.9	2.8	2.7	2.5
0.0	-1.0	3.0	3.0	2.9	2.9	2.9	2.7	2.5
2.0	1.0	3.1	3.1	3.1	3.0	2.9	2.7	2.5
5.0	4.0	3.4	3.4	3.2	3.1	3.0	2.8	2.5
7.0	6.0	3.5	3.4	3.2	3.1	3.0	2.8	2.6
9.0	7.8	3.6	3.4	3.2	3.1	3.0	2.8	2.6
12.0	10.6	3.6	3.4	3.2	3.1	3.0	2.8	2.6
15.0	13.5	3.6	3.4	3.2	3.1	3.0	2.8	2.6

### ■ 型号 : ASQA036

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
-15.0	-16.0	2.4	2.4	2.3	2.3	2.3	2.3	2.3
-12.0	-13.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6
-9.0	-10.0	2.9	2.9	2.9	2.9	2.9	2.9	2.9
-7.0	-8.0	3.1	3.1	3.1	3.1	3.1	3.0	3.0
-5.0	-6.0	3.3	3.3	3.3	3.3	3.3	3.2	3.1
-3.0	-4.0	3.5	3.5	3.5	3.4	3.4	3.4	3.2
-1.0	-2.0	3.7	3.7	3.7	3.7	3.6	3.5	3.2
0.0	-1.0	3.8	3.8	3.8	3.7	3.7	3.5	3.2
2.0	1.0	4.0	4.0	4.0	3.9	3.8	3.5	3.2
5.0	4.0	4.3	4.3	4.1	3.9	3.8	3.5	3.3
7.0	6.0	4.5	4.4	4.1	4.0	3.8	3.6	3.3
9.0	7.8	4.6	4.4	4.1	4.0	3.8	3.6	3.3
12.0	10.6	4.6	4.4	4.1	4.0	3.8	3.6	3.3
15.0	13.5	4.6	4.4	4.1	4.0	3.8	3.6	3.3

### ■ 型号 : ASQA040

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	2.2	2.2	2.2	2.2	2.2	2.2	2.2
-15.0	-16.0	2.6	2.6	2.6	2.6	2.6	2.6	2.5
-12.0	-13.0	2.9	2.9	2.9	2.9	2.9	2.8	2.8
-9.0	-10.0	3.2	3.2	3.2	3.2	3.2	3.1	3.1
-7.0	-8.0	3.4	3.4	3.4	3.4	3.4	3.3	3.3
-5.0	-6.0	3.6	3.6	3.6	3.6	3.6	3.5	3.5
-3.0	-4.0	3.8	3.8	3.8	3.8	3.8	3.8	3.5
-1.0	-2.0	4.1	4.0	4.0	4.0	4.0	3.8	3.5
0.0	-1.0	4.2	4.2	4.1	4.1	4.1	3.8	3.5
2.0	1.0	4.4	4.4	4.4	4.3	4.1	3.8	3.5
5.0	4.0	4.8	4.7	4.5	4.3	4.2	3.9	3.6
7.0	6.0	5.0	4.8	4.5	4.3	4.2	3.9	3.6
9.0	7.8	5.1	4.8	4.5	4.3	4.2	3.9	3.6
12.0	10.6	5.1	4.8	4.5	4.3	4.2	3.9	3.6
15.0	13.5	5.1	4.8	4.5	4.3	4.2	3.9	3.6

TC : 总制热量 (Total Capacity) kW.

## 2-8-10. 小型挂壁式 (EV 组件外置)

制热能力

### ■ 型号 : ASQE022

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4
-15.0	-16.0	1.6	1.6	1.6	1.6	1.6	1.6	1.6
-12.0	-13.0	1.8	1.8	1.8	1.8	1.8	1.8	1.8
-9.0	-10.0	2.0	2.0	2.0	2.0	2.0	2.0	1.9
-7.0	-8.0	2.1	2.1	2.1	2.1	2.1	2.1	2.1
-5.0	-6.0	2.3	2.2	2.2	2.2	2.2	2.2	2.2
-3.0	-4.0	2.4	2.4	2.4	2.4	2.4	2.3	2.2
-1.0	-2.0	2.5	2.5	2.5	2.5	2.5	2.4	2.2
0.0	-1.0	2.6	2.6	2.6	2.6	2.6	2.4	2.2
2.0	1.0	2.7	2.7	2.7	2.7	2.6	2.4	2.2
5.0	4.0	3.0	2.9	2.8	2.7	2.6	2.4	2.2
7.0	6.0	3.1	3.0	2.8	2.7	2.6	2.4	2.2
9.0	7.8	3.2	3.0	2.8	2.7	2.6	2.4	2.2
12.0	10.6	3.2	3.0	2.8	2.7	2.6	2.4	2.2
15.0	13.5	3.2	3.0	2.8	2.7	2.6	2.4	2.2

### ■ 型号 : ASQE028

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	1.6	1.6	1.6	1.6	1.6	1.6	1.5
-15.0	-16.0	1.8	1.8	1.8	1.8	1.8	1.8	1.8
-12.0	-13.0	2.1	2.1	2.0	2.0	2.0	2.0	2.0
-9.0	-10.0	2.3	2.3	2.3	2.2	2.2	2.2	2.2
-7.0	-8.0	2.4	2.4	2.4	2.4	2.4	2.4	2.4
-5.0	-6.0	2.6	2.6	2.5	2.5	2.5	2.5	2.5
-3.0	-4.0	2.7	2.7	2.7	2.7	2.7	2.7	2.5
-1.0	-2.0	2.9	2.9	2.9	2.9	2.8	2.7	2.5
0.0	-1.0	3.0	3.0	2.9	2.9	2.9	2.7	2.5
2.0	1.0	3.1	3.1	3.1	3.0	2.9	2.7	2.5
5.0	4.0	3.4	3.4	3.2	3.1	3.0	2.8	2.5
7.0	6.0	3.5	3.4	3.2	3.1	3.0	2.8	2.6
9.0	7.8	3.6	3.4	3.2	3.1	3.0	2.8	2.6
12.0	10.6	3.6	3.4	3.2	3.1	3.0	2.8	2.6
15.0	13.5	3.6	3.4	3.2	3.1	3.0	2.8	2.6

### ■ 型号 : ASQE036

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
-15.0	-16.0	2.4	2.4	2.3	2.3	2.3	2.3	2.3
-12.0	-13.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6
-9.0	-10.0	2.9	2.9	2.9	2.9	2.9	2.9	2.9
-7.0	-8.0	3.1	3.1	3.1	3.1	3.1	3.0	3.0
-5.0	-6.0	3.3	3.3	3.3	3.3	3.3	3.2	3.1
-3.0	-4.0	3.5	3.5	3.5	3.4	3.4	3.4	3.2
-1.0	-2.0	3.7	3.7	3.7	3.7	3.6	3.5	3.2
0.0	-1.0	3.8	3.8	3.8	3.7	3.7	3.5	3.2
2.0	1.0	4.0	4.0	4.0	3.9	3.8	3.5	3.2
5.0	4.0	4.3	4.3	4.1	3.9	3.8	3.5	3.3
7.0	6.0	4.5	4.4	4.1	4.0	3.8	3.6	3.3
9.0	7.8	4.6	4.4	4.1	4.0	3.8	3.6	3.3
12.0	10.6	4.6	4.4	4.1	4.0	3.8	3.6	3.3
15.0	13.5	4.6	4.4	4.1	4.0	3.8	3.6	3.3

### ■ 型号 : ASQE040

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	2.2	2.2	2.2	2.2	2.2	2.2	2.2
-15.0	-16.0	2.6	2.6	2.6	2.6	2.6	2.6	2.5
-12.0	-13.0	2.9	2.9	2.9	2.9	2.9	2.8	2.8
-9.0	-10.0	3.2	3.2	3.2	3.2	3.2	3.1	3.1
-7.0	-8.0	3.4	3.4	3.4	3.4	3.4	3.3	3.3
-5.0	-6.0	3.6	3.6	3.6	3.6	3.6	3.5	3.5
-3.0	-4.0	3.8	3.8	3.8	3.8	3.8	3.8	3.5
-1.0	-2.0	4.1	4.0	4.0	4.0	4.0	3.8	3.5
0.0	-1.0	4.2	4.2	4.1	4.1	4.1	3.8	3.5
2.0	1.0	4.4	4.4	4.4	4.3	4.1	3.8	3.5
5.0	4.0	4.8	4.7	4.5	4.3	4.2	3.9	3.6
7.0	6.0	5.0	4.8	4.5	4.3	4.2	3.9	3.6
9.0	7.8	5.1	4.8	4.5	4.3	4.2	3.9	3.6
12.0	10.6	5.1	4.8	4.5	4.3	4.2	3.9	3.6
15.0	13.5	5.1	4.8	4.5	4.3	4.2	3.9	3.6

TC : 总制热量 (Total Capacity) kW.

## 2-8-11. 挂壁式

### ■ 型号 : ASQA056

制热能力

机器选型

机器选型

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	3.1	3.1	3.1	3.1	3.1	3.1	3.0
-15.0	-16.0	3.6	3.6	3.6	3.6	3.6	3.6	3.6
-12.0	-13.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
-9.0	-10.0	4.5	4.5	4.4	4.4	4.4	4.4	4.4
-7.0	-8.0	4.8	4.8	4.7	4.7	4.7	4.7	4.7
-5.0	-6.0	5.1	5.1	5.0	5.0	5.0	5.0	4.8
-3.0	-4.0	5.4	5.4	5.3	5.3	5.3	5.3	4.9
-1.0	-2.0	5.7	5.7	5.6	5.6	5.6	5.3	4.9
0.0	-1.0	5.9	5.8	5.8	5.8	5.7	5.3	4.9
2.0	1.0	6.2	6.1	6.1	6.0	5.8	5.4	5.0
5.0	4.0	6.7	6.6	6.3	6.0	5.8	5.4	5.0
7.0	6.0	7.0	6.7	6.3	6.1	5.9	5.5	5.0
9.0	7.8	7.1	6.7	6.3	6.1	5.9	5.5	5.0
12.0	10.6	7.1	6.7	6.3	6.1	5.9	5.5	5.0
15.0	13.5	7.1	6.7	6.3	6.1	5.9	5.5	5.0

### ■ 型号 : ASQA071

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	3.9	3.9	3.9	3.9	3.9	3.9	3.9
-15.0	-16.0	4.6	4.6	4.6	4.6	4.5	4.5	4.5
-12.0	-13.0	5.1	5.1	5.1	5.1	5.1	5.1	5.0
-9.0	-10.0	5.7	5.7	5.6	5.6	5.6	5.6	5.6
-7.0	-8.0	6.1	6.0	6.0	6.0	6.0	5.9	5.9
-5.0	-6.0	6.5	6.4	6.4	6.4	6.3	6.3	6.1
-3.0	-4.0	6.8	6.8	6.8	6.7	6.7	6.7	6.2
-1.0	-2.0	7.2	7.2	7.1	7.1	7.1	6.8	6.2
0.0	-1.0	7.4	7.4	7.3	7.3	7.3	6.8	6.2
2.0	1.0	7.8	7.8	7.7	7.6	7.3	6.8	6.3
5.0	4.0	8.5	8.4	7.9	7.7	7.4	6.8	6.3
7.0	6.0	8.9	8.5	8.0	7.7	7.5	6.9	6.4
9.0	7.8	9.1	8.5	8.0	7.7	7.5	6.9	6.4
12.0	10.6	9.1	8.5	8.0	7.7	7.5	6.9	6.4
15.0	13.5	9.1	8.5	8.0	7.7	7.5	6.9	6.4

### ■ 型号 : ASQA080

室外温度		室内温度						
(° CDB)	(° CWB)	16° CDB	18° CDB	20° CDB	21° CDB	22° CDB	24° CDB	26° CDB
		TC	TC	TC	TC	TC	TC	TC
-19.3	-20.0	4.3	4.3	4.3	4.3	4.3	4.3	4.2
-15.0	-16.0	5.1	5.1	5.0	5.0	5.0	5.0	5.0
-12.0	-13.0	5.6	5.6	5.6	5.6	5.6	5.6	5.5
-9.0	-10.0	6.3	6.2	6.2	6.2	6.2	6.1	6.1
-7.0	-8.0	6.7	6.6	6.6	6.6	6.6	6.5	6.5
-5.0	-6.0	7.1	7.1	7.0	7.0	7.0	6.9	6.8
-3.0	-4.0	7.5	7.5	7.4	7.4	7.4	7.3	6.8
-1.0	-2.0	8.0	7.9	7.9	7.9	7.8	7.4	6.8
0.0	-1.0	8.2	8.1	8.1	8.0	8.0	7.5	6.9
2.0	1.0	8.6	8.6	8.5	8.4	8.1	7.5	6.9
5.0	4.0	9.3	9.2	8.7	8.4	8.2	7.6	7.0
7.0	6.0	9.7	9.4	8.8	8.5	8.2	7.6	7.0
9.0	7.8	10.0	9.4	8.8	8.5	8.2	7.6	7.0
12.0	10.6	10.0	9.4	8.8	8.5	8.2	7.6	7.0
15.0	13.5	10.0	9.4	8.8	8.5	8.2	7.6	7.0

TC : 总制热量 (Total Capacity) kW.