
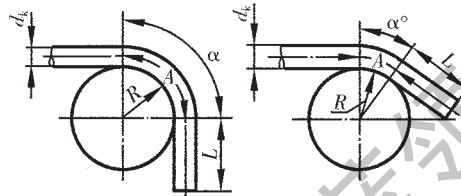


中国第一重型机械集团公司标准

## 管材最小弯曲半径

YZB 223-89



mm

$d_k$														
无缝钢管			不锈钢管			不锈钢无缝管			焊接钢管					
$d_k$	壁厚	$R$	$d_k$	壁厚	$R$	$d_k$	壁厚	$R$	$d_k$	壁厚	$R$		$l$ 最小	
											热	冷		
6	1	15	14	2	18	6	1	15	13.5	1/4"	40	80	40	
8	1	15	18	2	28	8	1	15	17	3/8"	50	100	45	
10	1.5	20	(22)	2	50	10	1.5	20	21.25	1/2"	2.75	65	130	50
12	1.5	25	25	2	50	12	1.5	25	26.75	3/4"	2.75	80	160	55
14	1.5	30	32	2.5	60	14	1.5	30	33.5	1"	3.25	100	200	70
14	3	18	38	2.5	70	16	1.5	30	42.25	1 1/4"	3.25	130	250	85
16	1.5	30	45	2.5	90	18	1.5	40	48	1 1/2"	3.5	150	290	100
18	1.5	40	57	2.5	110	20	1.5	40	60	2"	3.5	180	360	120
18	3	28	(76)	3.5	225	22	1.5	60	75.5	2 1/2"	3.75	225	450	150
20	1.5	40	89	4	250	25	3	60	88.5	3"	4	265	530	170
22	3	50	102			32	3	80	114	4"	4	340	680	230
25	3	50	(108)	4	360	38	3	80	125	5"		400		
32	3	60	133	4	400	41	3	100	150	6"	500			
32	3.5	60	139	4	450	57	4	180						
38	3	80				76	4	220						
38	3.5	70				89	4	270						
44.5	3	100				102								
45	3.5	90				108	6	340						
57	3.5	110				133	6	420						
57	4	150				159	6	600						
76	4	180				194	10	800						
89	4	220				219	12	900						
102														
108	4	270												
133	4	340												
159	4.5	450												
159	6	420												
194	6	500												
219	6	500												
245	6	600												
273	8	700												
325	8	800												
371	10	900												